

Appendix A: BOEM Permit, NMFS Biological Opinion, and NMFS Letter of Authorization



United States Department of the Interior

BUREAU OF OCEAN ENERGY MANAGEMENT

Gulf of Mexico Regional Office

1201 Elmwood Park Blvd

New Orleans, Louisiana 70123-2394

September 14, 2021

ELECTRONIC MAIL – RETURN RECEIPT REQUESTED

Chevron U.S.A., Inc.
Attention: Mr. Scott Baker
1500 Louisiana Street
Houston, TX 77002

Dear Mr. Baker,

Your request for a program modification for OCS Permit L21-014 received September 13, 2021 has been approved. Modification 01 requests the addition of a dither to the source point of +/- 2.5 m applied in the inline direction only. The permitted program is a 3D-VSP with DAS seismic survey.

A new environmental analysis was not required for this program modification. However, Chevron U.S.A., Inc. and its contractor are required to follow all requirements and mitigations as listed in Attachment A of the originally approved OCS Permit L21-014. Furthermore, any conditions stated in the applicable Letter of Authorization issued by the National Marine Fisheries Service must also be followed.

If you have any questions, please call Goh Sakulpitakphon at (504) 736-5731 (tanaporn.sakulpitakphon@boem.gov) or the Office of Resource Evaluation, Data Acquisition and Special Projects Unit at (504) 736-3231 (GGPermitsGOMR@boem.gov).

Sincerely,
TEREE

CAMPBELL

For Angela G. Guidry

Resource Studies Section Chief

Gulf of Mexico Office

Office of Resource Evaluation

Digitally signed by TERE
CAMPBELL
Date: 2021.09.14
09:57:25 -05'00'

Appendix A: Seismic Survey Mitigation and Protected Species Observer Protocols

This Appendix has been revised as of April 26, 2021, and replaces the original Appendix C (dated March 13, 2020). These protocols will be implemented by the Bureau of Ocean Energy Management (BOEM), the Bureau of Safety and Environmental Enforcement (BSEE), and provide guidelines to operators in complying with the Endangered Species Act (ESA; 16 U.S.C. §§ 1531-1544) and Marine Mammal Protection Act (MMPA; 16 U.S.C. §§1361-1423h). The measures contained herein apply to all seismic surveys approved by BOEM and associated with the federally regulated oil and gas program in the Gulf of Mexico.

Background

Geophysical surveys, including the use of airguns and airgun arrays may have an impact on marine wildlife. Many marine species are protected under the Endangered Species Act (ESA) and all marine mammals (including manatees) are protected under the Marine Mammal Protection Act (MMPA). The following Gulf of Mexico species are listed under the ESA:

ESA-listed Species common to the Gulf of Mexico
Gulf of Mexico Bryde's Whale (<i>Balaenoptera edeni</i>)
Sperm Whale (<i>Physeter macrocephalus</i>)
Green Turtle (<i>Chelonia mydas</i>) – North Atlantic DPS and South Atlantic DPS
Hawksbill Turtle (<i>Eretmochelys imbricata</i>)
Kemp's Ridley Turtle (<i>Lepidochelys kempii</i>)
Leatherback Turtle (<i>Dermochelys coriacea</i>) - Northwest Atlantic DPS
Loggerhead Turtle (<i>Caretta caretta</i>) – Northwest Atlantic Ocean DPS
Gulf Sturgeon (<i>Acipenser oxyrinchus desotoi</i>)
Oceanic Whitetip Shark (<i>Carcharhinus longimanus</i>)
Giant Manta Ray (<i>Manta birostris</i>)
West Indian Manatee (<i>Trichechus manatus</i>)*

*Managed by the US Fish and Wildlife Service

Note that this list can change as other species are listed/delisted, and this protocol shall be applied to any ESA-listed protected species (and all marine mammals) that occur in the Gulf of Mexico, including rare and extralimital species.

BSEE and BOEM consult jointly with the National Marine Fisheries Service (NMFS) and the U.S. Fish and Wildlife Service (FWS) under Section 7 of the ESA to ensure that BOEM- or BSEE-authorized activities do not jeopardize the continued existence of ESA-listed species nor result in destruction or adverse modification of designated critical habitat. Incidental take of ESA-listed species is prohibited except as authorized pursuant to an Incidental Take Statement in the attached Biological Opinion. Incidental take of ESA-listed marine mammals cannot be exempted under the ESA unless also authorized under the MMPA. In this case, NMFS is

developing an incidental take regulation (ITR) to facilitate subsequent issuance of MMPA authorization (as applicable) to operators to authorize take incidental to seismic surveys. The proposed regulations would establish a framework for authorization of incidental take by Level A and Level B harassment through MMPA authorization (as applicable). Once an ITR and subsequent LOA is complete, the Biological Opinion and associated Incidental Take Statement may be amended to exempt take for Gulf of Mexico Bryde's whale and sperm whale, which are listed under the ESA. Following development of the ITRs, implementation could occur via issuance of MMPA authorization (as applicable and as Letters of Authorization [LOAs]) upon request from individual industry applicants planning specific seismic survey activities.

These protocols are the result of coordination between BOEM, BSEE, and NMFS and are based on: past and present mitigation measures; terms and conditions and reasonable and prudent measures identified in the attached Biological Opinion issued to the Bureaus; conditions, mitigation, monitoring, and reporting requirements identified in the MMPA ITR (50 CFR part 217 Subpart S); and NMFS' technical memorandum on standards for a protected species observer and data management program (Baker et al. 2013). BSEE is tasked as the lead agency for compiling lessee or operator reporting data required under current Biological Opinions applicable to both Bureaus. Therefore, while BOEM is issuing these protocols, all observer reports described herein must be submitted to BSEE as well as to NMFS where specified.

In order to protect ESA-listed species and marine mammals during seismic operations, seismic operators will be required to use protected species observers (PSOs) and follow specific seismic survey protocols when operating. These measures contained herein apply to all on-lease ancillary activity surveys conducted under 30 CFR Part 550 and all off-lease surveys conducted under 30 CFR Part 551, regardless of water depth. Operators must demonstrate your compliance with these requirements by submitting to BSEE and NMFS reports as detailed below.

Definitions

Terms used in these protocols have the following meanings:

1. Protected species means any species listed under the ESA and/or protected by the MMPA. The requirements discussed herein focus on marine mammals and sea turtles since these species are the most likely to be observed during seismic surveys. However, other ESA-listed species (e.g., giant manta rays) are also protected and observations of them should be reported as detailed below.
2. Airgun means a device that releases compressed air into the water column, creating an acoustical energy pulse with the purpose of penetrating the seafloor.
3. Deep penetration surveys are defined as surveys using airgun arrays with total volume greater than 1,500 in³. These surveys may in some cases collect return signals using sensors incorporated into ocean-bottom cables (OBC) or autonomous

ocean-bottom nodes (OBN) placed on the seafloor. These surveys are also referred to as high energy surveys.

4. Shallow penetration surveys are defined as surveys using airgun arrays with total volume equal to or less than 1,500 in³, single airguns, boomers, or equivalent sources. These surveys are also referred to as low energy surveys.
5. Ramp-up (sometimes referred to as "soft start") means the gradual and systematic increase of emitted sound levels from an airgun array. Ramp-up begins by first activating a single airgun of the smallest volume, followed by doubling the number of active elements in stages until the full complement of an array's airguns are active. Each stage should be approximately the same duration, and the total duration should not be less than approximately 20 minutes for deep penetration surveys.
6. Shutdown of an airgun array means the immediate de-activation of all individual airgun elements of the array.
7. Exclusion zone means the area to be monitored for possible shutdown in order to reduce or eliminate the potential for injury of protected species. Two exclusion zones are defined, depending on the species and context.
8. Buffer zone means an area beyond the exclusion zone to be monitored for the presence of protected species that may enter the exclusion zone. During pre-clearance monitoring (i.e., before ramp-up begins), the buffer zone also acts as an extension of the exclusion zone in that observations of marine mammals and sea turtles within the buffer zone would also prevent airgun operations from beginning (i.e. ramp-up). The buffer zone is not applicable for contexts that require an exclusion zone beyond 500 meters. The buffer zone encompasses the area at and below the sea surface from the edge of the 0– 500 meter exclusion zone, out to a radius of 1000 meters from the edges of the airgun array (500–1,000 meters) The buffer zone is not applicable when the exclusion zone is greater than 500 meters, *i.e.*, the observational focal zone is not increased beyond 1,500 meters.
9. Visual monitoring means the use of trained protected species observers (herein referred to as visual PSOs) to scan the ocean surface visually for the presence of protected species. These observers must have successfully completed a visual observer training program as described below. The area to be scanned visually includes primarily the exclusion zone, but also the buffer zone. Visual monitoring of the exclusion zones and adjacent waters is intended to establish and, when visual conditions allow, maintain zones around the sound source that are clear of marine mammals and sea turtles, thereby reducing or eliminating the potential for injury. Visual monitoring of the buffer zone is intended to (1) provide additional protection to marine mammals and sea turtles and awareness and potential protection of other visual protected species that may be in the area during pre-clearance, and (2) during airgun use, aid in establishing and maintaining the exclusion zone by alerting the visual observer and crew of marine mammals and sea turtles that are outside of, but may approach and enter, the exclusion zone.
10. Acoustic monitoring means the use of trained personnel (sometimes referred to as

passive acoustic monitoring (PAM) operators, herein referred to as acoustic PSOs) to operate PAM equipment to acoustically detect the presence of marine mammals. These observers must have successfully completed a passive acoustic observer training program as described below. Acoustic monitoring is intended to further support visual monitoring in maintaining an exclusion zone around the sound source that is clear of marine mammals, in part for the purpose of reducing or eliminating the potential for injury. In cases where visual monitoring is not effective (e.g., due to weather, nighttime), acoustic monitoring may be used to allow certain activities to occur, as further detailed below.

General Requirements

1. A copy of a MMPA incidental take authorization (as applicable) and BOEM-approved Permit/Plan must be in the possession of the vessel operator, other relevant personnel, the lead PSO (see description below), and any other relevant designees operating under the authority of the MMPA authorization (as applicable) and BOEM Permit/Plan.
2. The MMPA authorization holder (as applicable) and BOEM-approved Permit/Plan holder shall instruct relevant vessel personnel with regard to the authority of the protected species monitoring team (PSO team), and shall ensure that relevant vessel personnel and the PSO team participate in a joint onboard briefing (hereafter PSO briefing) led by the vessel operator and lead PSO to ensure that responsibilities, communication procedures, protected species monitoring protocols, operational procedures, and MMPA authorization (as applicable) and BOEM Permit/Plan requirements are clearly understood. This PSO briefing must be repeated when relevant new personnel join the survey operations before work commences.
3. The acoustic source must be deactivated when not acquiring data or preparing to acquire data, except as necessary for testing. Unnecessary use of the acoustic source must be avoided. For surveys using airgun arrays as the acoustic source notified operational capacity (not including redundant backup airguns) must not be exceeded during the survey, except where unavoidable for source testing and calibration purposes. All occasions where activated source volume exceeds notified operational capacity must be communicated to the PSO(s) on duty and fully documented. The lead PSO must be granted access to relevant instrumentation documenting acoustic source power and/or operational volume.

Protected Species Observers (PSOs, Visual and Acoustic)

Qualifications

1. The MMPA authorization (as applicable) and BOEM-approved Permit/Plan holder must use independent, dedicated, trained visual and acoustic PSOs, meaning that the PSOs must be employed by a third-party observer provider, may have no tasks other than to conduct observational effort (visual or acoustic), collect data, and communicate

with and instruct relevant vessel crew with regard to the presence of protected species and mitigation requirements (including brief alerts regarding maritime hazards), and must have successfully completed an approved PSO training course appropriate for their designated task (visual or acoustic). Acoustic PSOs are required to complete specialized training for operating PAM systems and are encouraged to have familiarity with the vessel with which they will be working. PSOs can act as acoustic or visual observers (but not at the same time) as long as they demonstrate to NMFS (nmfs.psoreview@noaa.gov) that their training and experience are sufficient to perform necessary tasks. NMFS must review and approve PSO resumes accompanied by a relevant training course information packet that includes the name and qualifications (i.e., experience, training completed, or educational background) of the instructor(s), the course outline or syllabus, and course reference material as well as a document stating successful completion of the course. NMFS shall have one week to approve PSOs from the time that the necessary information is submitted by the BOEM-approved Permit/Plan holder, after which PSOs meeting the minimum requirements shall automatically be considered approved.

2. At least one visual and two acoustic PSOs (when required) aboard the vessel must have a minimum of 90 days at-sea experience working in those roles, respectively, with no more than 18 months elapsed since the conclusion of the at-sea experience. One visual PSO with such experience shall be designated as the lead for the entire protected species observation team. The lead shall coordinate duty schedules and roles for the PSO team and serve as primary point of contact for the vessel operator (the responsibility of coordinating duty schedules and roles may instead be assigned to a shore-based, third-party monitoring coordinator). To the maximum extent practicable, the lead PSO shall devise the duty schedule such that experienced PSOs are on duty with those PSOs with appropriate training but who have not yet gained relevant experience.
 - a. PSOs must successfully complete relevant training, including completion of all required coursework and passing (80 percent or greater) a written and/or oral examination developed for the training program. PSOs must have successfully attained a bachelor's degree from an accredited college or university with a major in one of the natural sciences, a minimum of 30 semester hours or

equivalent in the biological sciences, and at least one undergraduate course in math or statistics. The educational requirements may be waived if the PSO has acquired the relevant skills through alternate experience. Requests for such a waiver shall be submitted by the BOEM-approved Permit/Plan holder to NMFS (nmfs.psoreview@noaa.gov) and must include written justification. Requests shall be granted or denied (with justification) by NMFS within one week of receipt of submitted information. Alternate experience that may be considered includes, but is not limited to: (1) secondary education and/or experience comparable to PSO duties; (2) previous work experience conducting academic, commercial, or government-sponsored protected species surveys; or (3) previous work experience as a PSO; the PSO should demonstrate good standing and consistently good performance of PSO duties.

Equipment

The MMPA incidental take authorization (as applicable) and BOEM-approved Permit/Plan holder is required to:

1. Provide PSOs with bigeye binoculars (e.g., 25 x 150; 2.7 view angle; individual ocular focus; height control) of appropriate quality solely for PSO use. These shall be pedestal-mounted on the deck at the most appropriate vantage point that provides for optimal sea surface observation, PSO safety, and safe operation of the vessel.
2. Work with the selected third-party observer provider to ensure PSOs have all equipment (including backup equipment) needed to adequately perform necessary tasks, including accurate determination of distance and bearing to observed protected species. Such equipment, at a minimum, shall include:
 - a. Each vessel requiring PAM will include a passive acoustic monitoring system that has been verified and tested by an experienced acoustic PSO that will be using it during the trip for which monitoring is required.
 - b. Reticle binoculars (e.g., 7 x 50) of appropriate quality (at least one per PSO, plus backups)
 - c. Global Positioning Units (GPS) (plus backup)
 - d. Digital camera with a telephoto lens (the camera or lens should also have an image stabilization system) that is at least 300 mm or equivalent on a full-frame single lens reflex (SLR) (plus backup)
 - e. Radios for communication among vessel crew and PSOs (at least one per PSO, plus backups)
 - f. Any other tools necessary to adequately perform necessary PSO tasks.

Equipment specified in (a) through (g) above may be provided by an individual PSO, the third-party observer provider, or the MMPA authorization (as applicable) and BOEM-approved Permit/Plan holder but the latter is responsible for ensuring PSOs have the proper equipment required to perform the duties specified within these protocols.

Data Collection

PSOs must use standardized data collection forms. PSOs shall record detailed information about any implementation of mitigation requirements, including the distance of animals to the acoustic source and description of specific actions that ensued, the behavior of the animal(s), any observed changes in behavior before and after implementation of mitigation, and if shutdown was implemented, the length of time before any subsequent ramp-up of the acoustic source. If required mitigation was not implemented, PSOs should record a description of the circumstances. At a minimum, the following information must be recorded:

1. BOEM Permit/Plan number;
2. Vessel names (source vessel and other vessels associated with survey), vessel size and type, maximum speed capability of vessel, port of origin, and call signs;
3. PSO names and affiliations;
4. Dates of departures and returns to port with port name;
5. Date and participants of PSO briefings (as discussed in General Requirements. 2);
6. Dates and times (Greenwich Mean Time) of survey effort and times corresponding with PSO effort;
7. Vessel location (latitude/longitude) when survey effort began and ended and vessel location at beginning and end of visual PSO duty shifts;
8. Vessel heading and speed at beginning and end of visual PSO duty shifts and upon any line change;
9. Environmental conditions while on visual survey (at beginning and end of PSO shift and whenever conditions changed significantly), including BSS and any other relevant weather conditions including cloud cover, fog, sun glare, and overall visibility to the horizon;
10. Factors that may have contributed to impaired observations during each PSO shift change or as needed as environmental conditions changed (e.g., vessel traffic, equipment malfunctions);
11. Survey activity information, such as acoustic source power output while in operation, number and volume of airguns operating in the array, tow depth of the array, and any other notes of significance (i.e., pre-clearance, ramp-up, shutdown, testing, shooting, ramp-up completion, end of operations, streamers, etc.); and
12. Upon visual observation of any protected species, the following information:
 - a. Watch status (sighting made by PSO on/off effort, opportunistic, crew, alternate vessel/platform);
 - b. PSO who sighted the animal;
 - c. Time of sighting;
 - d. Vessel location (coordinates) at time of sighting;
 - e. Water depth;
 - f. Direction of vessel's travel (compass direction);
 - g. Direction of animal's travel relative to the vessel;
 - h. Pace of the animal;

- i. Estimated distance to the animal and its heading relative to vessel at initial sighting;
 - j. Identification of the animal (e.g., genus/species, lowest possible taxonomic level, or unidentified), PSO confidence in identification, and the composition of the group if there is a mix of species;
 - k. Estimated number of animals (high/low/best);
 - l. Estimated number of animals by cohort (adults, juveniles, group composition, etc.);
 - m. Description (as many distinguishing features as possible of each individual seen, including length, shape, color, pattern, scars or markings, shape and size of dorsal fin, shape of head, and blow characteristics);
 - n. Detailed behavior observations (e.g., number of blows/breaths, number of surfaces, breaching, spyhopping, diving, feeding, traveling; as explicit and detailed as possible; note any observed changes in behavior), including an assessment of behavioral responses to survey activity;
 - o. Animal's closest point of approach (CPA) and/or closest distance from any element of the acoustic source;
 - p. Platform activity at time of sighting (e.g., deploying, recovering, testing, shooting, data acquisition, other); and
 - q. Description of any actions implemented in response to the sighting (e.g., delays, shutdown, ramp-up) and time and location of the action.
13. If a marine mammal is detected while using the PAM system, the following information should be recorded:
- a. An acoustic encounter identification number, and whether the detection was linked with a visual sighting;
 - b. Date and time when first and last heard;
 - c. Types and nature of sounds heard (e.g., clicks, whistles, creaks, burst pulses, continuous, sporadic, strength of signal);
 - d. Any additional information recorded such as water depth of the hydrophone array, bearing of the animal to the vessel (if determinable), species or taxonomic group (if determinable), spectrogram screenshot, and any other notable information.

Deep Penetration Seismic Survey Protocols

Visual Monitoring

1. During survey operations (e.g., any day on which use of the acoustic source is planned to occur, and whenever the acoustic source is in the water, whether activated or not), a minimum of two visual PSOs must be on duty and conducting visual observations at all times during daylight hours (i.e., from 30 minutes prior to sunrise through 30 minutes following sunset).
2. Visual monitoring must begin no less than 30 minutes prior to ramp-up and must

continue until one hour after use of the acoustic source ceases or until 30 minutes past sunset.

3. Visual PSOs shall coordinate to ensure 360° visual coverage around the vessel from the most appropriate observation posts, and shall conduct visual observations using binoculars and the naked eye while free from distractions and in a consistent, systematic, and diligent manner.
4. PSOs shall establish and monitor applicable exclusion and buffer zones. These zones shall be based upon the radial distance from the edges of the airgun array (rather than being based on the center of the array or around the vessel itself). During use of the acoustic source (i.e., anytime the acoustic source is active, including ramp-up), occurrences of protected species within the buffer zone (but outside the exclusion zone) should be communicated to the operator to prepare for the potential shutdown for marine mammals (or voluntary pause for other non-marine mammal protected species [e.g., sea turtles] if being employed) of the acoustic source.
5. Visual PSOs shall immediately communicate all observations to the on duty acoustic PSO(s), including any determination by the PSO regarding species identification, distance, and bearing and the degree of confidence in the determination.
6. Any observations of protected species by crew members aboard any vessel associated with the survey shall be relayed to the PSO team.
7. During good conditions (e.g., daylight hours; Beaufort sea state (BSS) 3 or less), visual PSOs shall conduct observations when the acoustic source is not operating for comparison of sighting rates and behavior with and without use of the acoustic source and between acquisition periods, to the maximum extent practicable.
8. Visual PSOs may be on watch for a maximum of two consecutive hours followed by a break of at least one hour between watches and may conduct a maximum of 12 hours of observation per 24-hour period. Combined observational duties (visual and acoustic but not at same time) may not exceed 12 hours per 24-hour period for any individual PSO. NMFS may grant an exception for LOA applications that demonstrate such a “two hours on/one hour off” duty cycle is not practicable, in which case visual PSOs will be subject to a maximum of four consecutive hours on watch followed by a break of at least two hours between watches. Combined observational duties (visual and acoustic but not at the same time) must not exceed 12 hours per 24-hour period for any individual PSO

Acoustic Monitoring

1. Applicants must provide a PAM plan to NMFS according to the MMPA authorization including description of the hardware and software proposed for use prior to proceeding with any survey where PAM is required. The source vessel must use a towed PAM system at all times when operating in waters deeper than 100 m, which

must be monitored by at a minimum one on duty acoustic PSO beginning at least 30 minutes prior to ramp-up, at all times during use of the acoustic source, and until one hour after use of the acoustic source ceases. “PAM system” refers to calibrated hydrophone arrays with full system redundancy to detect, identify, and estimate distance and bearing to vocalizing cetaceans, coupled with appropriate software to aid monitoring and listening by a PAM operator skilled in bioacoustics analysis and computer system specifications capable of running appropriate software. The PAM system must have at least one calibrated hydrophone (per each deployed hydrophone type and/or set) sufficient for determining whether background noise levels on the towed PAM system are sufficiently low to meet performance expectations).

2. Acoustic PSOs shall immediately communicate all detections to visual PSOs, when visual PSOs are on duty, including any determination by the PSO regarding species identification, distance, and bearing and the degree of confidence in the determination.
3. Acoustic PSOs may be on watch for a maximum of four consecutive hours followed by a break of at least two hours between watches and may conduct a maximum of 12 hours of observation per 24-hour period. Combined observational duties (acoustic and visual but not at same time) may not exceed 12 hours per 24-hour period for any individual PSO.
4. Survey activity may continue for 30 minutes when the PAM system malfunctions or is damaged, while the PAM operator diagnoses the issue. If the diagnosis indicates that the PAM system must be repaired to solve the problem, operations may continue for an additional two hours without acoustic monitoring during daylight hours only under the following conditions:
 - a. Sea state is less than or equal to BSS 4;
 - b. No marine mammals (excluding delphinids) detected solely by PAM in the applicable exclusion zone in the previous two hours;
 - c. NMFS and BSEE are notified via email (nmfs.psoreview@noaa.gov and protectedspecies@bsee.gov, respectively) as soon as practicable with the time and location in which operations began occurring without an active PAM system; and
 - d. Operations with an active acoustic source, but without an operating PAM system, do not exceed a cumulative total of four hours in any 24-hour period.

Pre-clearance and Ramp-up

The intent of pre-clearance observation (30 minutes) is to ensure no protected species are observed within the exclusion zones, and buffer zone if applicable (i.e., only when the exclusion zone is equal to 500 meters, see Definitions section for details on when the buffer

zone is not applicable), prior to the beginning of ramp-up. During pre-clearance is the only time observations of protected species in the buffer zone would prevent operations (i.e., the beginning of ramp-up). The intent of ramp-up is to warn protected species of pending seismic operations and to allow sufficient time for those animals to leave the immediate vicinity. A ramp-up procedure, involving a step-wise increase in the number of airguns firing and total array volume until all operational airguns are activated and the full volume is achieved, is required at all times as part of the activation of the acoustic source. All operators must adhere to the following pre-clearance and ramp-up requirements, which are applicable to both marine mammals and sea turtles:

1. The operator must notify a designated PSO of the planned start of ramp-up as agreed upon with the lead PSO; the notification time should not be less than 60 minutes prior to the planned ramp-up.
2. Ramp-ups shall be scheduled so as to minimize the time spent with the source activated prior to reaching the designated run-in.
3. A designated PSO must be notified again immediately prior to initiating ramp-up procedures and the operator must receive confirmation from the PSO to proceed.
4. Ramp-up may not be initiated if any marine mammal or sea turtle is within the applicable exclusion or buffer zone. If a marine mammal or sea turtle is observed within the applicable exclusion zone or the buffer zone during the 30 minute pre-clearance period, ramp-up may not begin until the animal(s) has been observed exiting the zones or until an additional time period has elapsed with no further sightings (15 minutes for small odontocetes and 30 minutes for all other species including sea turtles).
5. Ramp-up shall begin by activating a single airgun of the smallest volume in the array and shall continue in stages by doubling the number of active elements at the commencement of each stage, with each stage of approximately the same duration. Duration shall not be less than 20 minutes. The operator must provide information to the PSO documenting that appropriate procedures were followed.
6. PSOs must monitor the exclusion and buffer zones during ramp-up, and ramp-up must cease and the source must be shut down upon observation of a marine mammal or sea turtle within the applicable exclusion zone. Once ramp-up has begun, observations of marine mammals and sea turtles within the buffer zone do not require shutdown, or voluntarily pause for other non-marine mammal protected species (e.g., sea turtles) if being employed, but such observation shall be communicated to the operator to prepare for the potential shutdown, or voluntarily pause if being employed.
7. Ramp-up may occur at times of poor visibility, including nighttime, if appropriate acoustic monitoring has occurred with no detections in the 30 minutes prior to beginning ramp-up. Acoustic source activation may only occur at times of poor

visibility where operational planning cannot reasonably avoid such circumstances.

8. If the acoustic source is shut down for brief periods (i.e., less than 30 minutes) for reasons other than implementation of prescribed mitigation (e.g., mechanical difficulty), it may be activated again without ramp-up if PSOs have maintained constant visual and/or acoustic observation and no visual detections of marine mammals or sea turtles have occurred within the applicable exclusion zone and no acoustic detections of marine mammals have occurred. For any longer shutdown, pre-clearance observation and ramp-up are required. For any shutdown at night or in periods of poor visibility (e.g., BSS 4 or greater), ramp-up is required, but if the shutdown period was brief and constant observation was maintained, pre-clearance watch of 30 min is not required.
9. Testing of the acoustic source involving all elements requires ramp-up. Testing limited to individual source elements or strings does not require ramp-up but does require pre-clearance observation period.

Shutdown

For non-marine mammal protected species (e.g., sea turtles), shutdowns are not required. However, the BOEM Permit or authorized Plan and MMPA authorization (as applicable) holder may employ a voluntary pause during which the visual PSO would request that the operator voluntarily pause the airgun array for six shots if a non-marine mammal protected species is observed within the exclusion zone (within 500 meters) during active airgun use, to let the animal float past the array while it is inactive. For marine mammals, all operators must adhere to the following shutdown requirements:

1. Any PSO on duty has the authority to delay the start of survey operations or to call for shutdown of the acoustic source if a marine mammal is detected within the applicable exclusion zone.
2. The operator must establish and maintain clear lines of communication directly between PSOs on duty and crew controlling the acoustic source to ensure that shutdown, and voluntary pause commands (optional for other protected species) are conveyed swiftly while allowing PSOs to maintain watch.
3. When both visual and acoustic PSOs are on duty, all detections must be immediately communicated to the remainder of the on-duty PSO team for potential verification of visual observations by the acoustic PSO or of acoustic detections by visual PSOs.
4. Two exclusion zones are defined, depending on the species and context. A standard exclusion zone encompassing the area at and below the sea surface out to a radius of 500 meters from the edges of the airgun array (0-500 m) is defined. An extended 1,500-m exclusion zone must be applied upon detection (visual or acoustic) of a baleen whale, sperm whale, beaked whale or *Kogia* spp. within the zone.
5. When the airgun array is active (i.e., any time one or more airguns is active, including during ramp-up) and (1) a marine mammal appears within or enters the applicable exclusion zone and/or (2) a marine mammal (excluding delphinids) is detected acoustically and localized within the applicable exclusion zone, the acoustic source must be shut down. When shutdown is called for by a PSO, the acoustic source must be

immediately deactivated and any dispute resolved only following deactivation.

6. The shutdown requirement is waived for dolphins of the following genera:
Steno, *Tursiops*, *Stenella*, and *Lagenodelphis*.
 - a. If a small delphinid (individual of the Family Delphinidae, which includes the aforementioned dolphin genera), is acoustically detected and localized within the exclusion zone, no shutdown is required unless the acoustic PSO or a visual PSO confirms the individual to be of a genera other than those listed above, in which case a shutdown is required.
7. If there is uncertainty regarding identification (i.e., whether the observed marine mammal(s) belongs to one of the delphinid genera for which shutdown is waived or one of the species with a larger exclusion zone), visual PSOs may use best professional judgment in making the decision to call for a shutdown.
8. Upon implementation of shutdown, the source may be reactivated after the marine mammal(s) has been observed exiting the applicable exclusion zone (i.e., animal is not required to fully exit the buffer zone where applicable) or following a 30-minute clearance period with no further observation of the marine mammal(s).

Time-area closure

From January 1 through May 31, no use of airguns may occur shoreward of the 20-m isobaths and between 90-84° W

Shallow penetration protocols

1. The requirements defined for deep penetration surveys shall be followed, with the following exceptions:
 - a. PAM is not required for shallow penetration surveys.
 - b. Ramp-up for small airgun arrays must follow the procedure described above for large airgun arrays, but may occur over an abbreviated period of time. Ramp-up is not required for surveys using only a single airgun. For sub-bottom profilers, power should be increased as feasible to effect a ramp-up.
 - c. Two exclusion zones are defined, depending on the species and context. A standard exclusion zone encompassing the area at and below the sea surface out to a radius of 100 meters from the edges of the airgun array (if used) or from the acoustic source (0-100 m) is defined. An extended 500-m exclusion zone must be applied upon detection (visual or acoustic) of a baleen whale, sperm whale, beaked whale or *Kogia* spp. within the zone.
 - d. The buffer zone encompasses the area at and below the sea surface from the edge of the 0-100 meter exclusion zone out to a radius of 200 meters from the edges of the airgun array (if used) or from the acoustic source (100-200 meters). The buffer zone is not applicable when the exclusion zone is greater than 100 meters.

Non-Airgun High-Resolution Geophysical (HRG) Protocol

Non-airgun HRG surveys are conducted in leases and along pipeline routes to evaluate the potential for geohazards, archaeological resources, and certain types of benthic communities. Non-airgun HRG sources include but are not limited to side-scan sonars, boomers, sparkers (in limited situations) and compressed high-intensity radiated pulse (CHIRP) sub bottom profilers (in limited situations), and single-beam or multibeam depth sounders.

Non-Airgun HRG Surveys with Frequencies ≥ 180 kHz

Acoustic sources do not require detailed analyses because the frequency is outside the general hearing range of marine mammals.

Non-Airgun HRG Surveys with Frequencies < 180 kHz

For all non-airgun HRG surveys in which one or more active acoustic sound sources are operating at < 180 kHz, the requirements defined for shallow penetration surveys shall be followed, with the following exceptions:

1. Pre-clearance watch is required for a period of 30 minutes and over a 200-m radius from the acoustic source.
2. When operating in waters deeper than 100-m, during survey operations (*e.g.*, any day on which use of the acoustic source is planned to occur, and whenever the acoustic source is in the water, whether activated or not), a minimum of one trained and experienced independent PSO must be on duty and conducting visual observations at all times during daylight hours (*i.e.*, from 30 minutes prior to sunrise through 30 minutes following sunset).
3. When operating in waters shallower than 100-m, a minimum of one trained visual PSO, which may be a crew member, must be employed. PSOs employed during shallow-water HRG surveys are only required during the pre-clearance period.
4. PSOs are not required during survey operations in which the active acoustic source(s) are deployed on an autonomous underwater vehicle.
5. PAM is not required for HRG surveys. Shutdowns are not required for HRG surveys.

Entanglement and Entrainment Risk Reduction

Nodal Survey Requirements

To avoid the risk of entanglement, lessees and operators conducting surveys using ocean-bottom nodes or similar gear must:

1. Use negatively buoyant coated wire-core tether cable;
2. Ensure any cables/lines are designed to be rigid;

3. Retrieve all lines immediately following completion of the survey; and
4. Attach acoustic pingers directly to the coated tether cable; acoustic releases should not be used.

Reporting

1. The BOEM Permit/Plan holder shall submit interim reports (see Data Collection section for details) on the 1st of each month to BSEE (protectedspecies@bsee.gov) detailing all protected species observations with closest approach distance. The MMPA authorization (as applicable) and BOEM Permit/Plan holder shall submit a draft comprehensive report to BOEM/BSEE (protectedspecies@boem.gov and protectedspecies@bsee.gov) and NMFS (nmfs.psoreview@noaa.gov) on all activities and monitoring results within 90 days of the completion of the survey or expiration of the MMPA authorization (as applicable) or BOEM Permit/Plan, whichever comes sooner, or if an issued MMPA authorization is valid for greater than one year, the summary report must be submitted on an annual basis. The report must describe all activities conducted and sightings of protected species near the activities, must provide full documentation of methods, results, and interpretation pertaining to all monitoring, and must summarize the dates and locations of survey operations and all protected species sightings (dates, times, locations, activities, associated survey activities, and information regarding locations where the acoustic source was used). For operations requiring the use of PAM, the report must include a validation document concerning the use of PAM, which should include necessary noise validation diagrams and demonstrate whether background noise levels on the PAM deployment limited achievement. The draft report shall also include geo-referenced time-stamped vessel track lines for all time periods during which airguns were operating. Track lines should include points recording any change in airgun status (e.g., when the airguns began operating, when they were turned off, or when they changed from full array to single gun or vice versa). GIS files shall be provided in ESRI shapefile format and include the UTC date and time, latitude in decimal degrees, and longitude in decimal degrees. All coordinates shall be referenced to the WGS84 geographic coordinate system. In addition to the report, all raw observational data shall be made available to BOEM/BSEE and NMFS. The report must summarize the information submitted in interim monthly reports as well as additional data collected as described above in *Data Collection* and the MMPA authorization (as applicable). The draft report must be accompanied by a certification from the lead PSO as to the accuracy of the report, and the lead PSO may submit directly to BOEM/BSEE and NMFS a statement concerning implementation and effectiveness of the required mitigation and monitoring. A final report must be submitted within 30 days following resolution of any comments on the draft report.
2. Reporting injured or dead protected species:
The MMPA authorization (as applicable) and BOEM Permit/Plan holder must report

sightings of any injured or dead aquatic protected species immediately, regardless of the cause of injury or death. For reporting dead or injured marine mammals, refer to the reporting requirements specified in the MMPA authorization (as applicable), associated with the activity being conducted, and Appendix C

References

Baker, K., D. Epperson, G. Gitschlag, H. Goldstein, J. Lewandowski, K. Skrupky, B. Smith, and T. Turk. 2013. National standards for a protected species observer and data management program: A model using geological and geophysical surveys. Technical Memorandum NMFS-OPR-49, Office of Protected Resources, National Marine Fisheries Service, National Oceanic and Atmospheric Administration; Bureau of Ocean Energy Management, U.S. Department of the Interior; Bureau of Safety and Environmental Enforcement, U.S. Department of the Interior, Silver Spring, Maryland.

Appendix C. Vessel Strike Avoidance and Injured/Dead Aquatic Protected Species Reporting Protocols

This Appendix has been revised as of April 26, 2021 and replaces the original Appendix C (dated March 13, 2020). These protocols will be implemented by the Bureau of Ocean Energy Management (BOEM) and the Bureau of Safety and Environmental Enforcement (BSEE) through non-discretionary conditions of approval (COA) applied programmatically to BOEM/BSEE permitted activities (see Attachment 1 to the amended Incidental Take Statement), and provide guidelines to operators in complying with the Endangered Species Act (ESA; 16 U.S.C. §§ 1531-1544) and Marine Mammal Protection Act (MMPA; 16 U.S.C. §§1361- 1423h). The measures contained herein apply to all seismic surveys approved by BOEM and associated with the federally regulated oil and gas program in the Gulf of Mexico.

Aquatic Protected Species Identification

Crew and supply vessel personnel should use a Gulf of Mexico reference guide that includes identifying information on marine mammals, sea turtles, and other marine protected species (i.e., Endangered Species Act listed species such as Gulf sturgeon, giant manta ray, or oceanic whitetip shark; hereafter collectively termed “other aquatic protected species”) that may be encountered in the Gulf of Mexico Outer Continental Shelf (OCS). Vessel operators must comply with the below measures except under extraordinary circumstances when the **safety of the vessel or crew is in doubt or the safety of life at sea is in question.**

Vessel Strike Avoidance

1. Vessel operators and crews must maintain a vigilant watch for all aquatic protected species and slow down, stop their vessel, or alter course, as appropriate and regardless of vessel size, to avoid striking any protected species. A single aquatic protected species at the surface may indicate the presence of submerged animals in the vicinity of the vessel; therefore, precautionary measures should always be exercised. A visual observer aboard the vessel must monitor a vessel strike avoidance zone (species-specific distances detailed below) around the vessel according to the parameters stated below, to ensure the potential for strike is minimized. Visual observers monitoring the vessel strike avoidance zone can be either third-party observers or crew members (e.g., captain), but crew members responsible for these duties must be provided sufficient training to distinguish aquatic protected species to broad taxonomic groups, as well as those specific species detailed further below.
2. Vessel speeds must also be reduced to 10 knots or less when mother/calf pairs, pods, or large assemblages (greater than three) of any marine mammal are observed near a vessel.

3. All vessels must maintain a minimum separation distance of 100 meters (m) from sperm whales, and 500 m from any baleen whale to specifically protect the Gulf of Mexico Bryde's whale.
4. All vessels must, to the maximum extent practicable, attempt to maintain a minimum separation distance of 50 meters from all "other aquatic protected species" including sea turtles, with an exception made for those animals that approach the vessel.
5. When aquatic protected species are sighted while a vessel is underway, the vessel should take action as necessary to avoid violating the relevant separation distance (e.g., attempt to remain parallel to the animal's course, avoid excessive speed or abrupt changes in direction until the animal has left the area). If aquatic protected species are sighted within the relevant separation distance, the vessel should reduce speed and shift the engine to neutral, not engaging the engines until animals are clear of the area. This does not apply to any vessel towing gear (e.g., source towed array and site clearance trawling).
6. Any BOEM/BSEE-authorized or -permitted activity occurring within the Eastern Planning Area will be subject to a step-down review with NMFS under the attached 2020 biological opinion on BOEM Oil and Gas Program Activities in the Gulf of Mexico.

The above requirements do not apply in any case where compliance would create an imminent and serious threat to a person or vessel or to the extent that a vessel is restricted in its ability to maneuver and, because of that restriction, is unable to comply.

Injured/Dead Protected Species Reporting

The measures below have been revised from the original measures (contained in the Appendices to the biological opinion dated March 13, 2020) in accordance with the revised proposed action (see Attachments 1 and 2 to the amended ITS).

At all times, vessel operators must report sightings of any injured or dead aquatic protected species immediately, regardless of whether the injury or death was caused by the operator's vessel. If the injury or death was caused by a collision with the operator's vessel, the operator must immediately report the incident to NMFS by email at nmfs.psoreview@noaa.gov and must also immediately report the incident to the appropriate NMFS contact below for 24 hour response. The operator must further notify BOEM and BSEE within 24 hours of the strike by email to protectedspecies@boem.gov and protectedspecies@bsee.gov. The report must include the following information:

1. Time, date, and location (latitude/longitude) of the incident;
2. Species identification (if known) or description of the animal(s) involved;
3. Vessel's speed during and leading up to the incident;
4. Vessel's course/heading and what operations were being conducted (if applicable);
5. Status of all sound sources in use;

6. Description of avoidance measures/requirements that were in place at the time of the strike and what additional measures were taken, if any, to avoid strike;
7. Environmental conditions (*e.g.*, wind speed and direction, Beaufort sea state, cloud cover, visibility) immediately preceding the strike;
8. Estimated size and length of animal that was struck;
9. Description of the behavior of the marine mammal immediately preceding and following the strike;
10. If available, description of the presence and behavior of any other marine mammals immediately preceding the strike;
11. Estimated fate of the animal (*e.g.*, dead, injured but alive, injured and moving, blood or tissue observed in the water, status unknown, disappeared); and
12. To the extent practicable, photographs or video footage of the animal(s).

In the event that any of the following occur at any time, immediate reporting of the incident is required, after personnel and/or diver safety is ensured:

- Entanglement or entrapment of a protected species (*i.e.*, an animal is entangled in a line or cannot or does not leave a moon pool of its own volition).
- Injury of a protected species (*e.g.*, the animal appears injured or lethargic).
- Interaction or contact with equipment by a protected species.
- Any observation of a leatherback sea turtle within a moon pool (regardless of whether it appears injured, or an interaction with equipment or entanglement/entrapment is observed).

As soon as personnel and/or diver safety is ensured, any of the incidents listed above must be reported to NMFS by contacting the appropriate expert for 24-hr response. If an immediate response is not received, the operator must keep trying until contact is made. Any failed attempts should be documented. Contact information for reporting is as follows:

- Marine mammals: contact Southeast Region's Marine Mammal Stranding Hotline at 1-877-433-8299.
- Sea turtles: contact NMFS Veterinary Medical Officer at 352-283-3370. If no answer, contact (301) 301-3061. This includes the immediate reporting of any observation of a leatherback sea turtle within a moon pool.
- Other protected species (*e.g.*, giant manta ray, oceanic whitetip shark, or Gulf sturgeon): contact the ESA Section 7 biologist at 301-427-8413.

The report must include the following information:

1. Time, date, water depth and location (latitude/longitude) of the first discovery (and updated location information if known and applicable);
2. Name, type, and call sign of the vessel in which the event occurred;
3. Equipment being utilized at time of observation;
4. Species identification (if known) or description of the animal(s) involved;
5. Approximate size of animal;
6. Condition of the animal(s) during the event and any observed injury / behavior;
7. photographs or video footage of the animal(s), if able; and
8. General narrative and timeline describing events that took place.

After the appropriate contact(s) have been made for guidance/assistance as described above, the operator may call BSEE at 985-722-7902 (24 hours/day) for questions or additional guidance on recovery assistance needs (if still required) and continued monitoring requirements. The operator may also contact this number if a timely response from the appropriate contact(s) listed above were not received.



LETTER OF AUTHORIZATION

Chevron U.S.A. Inc. and its designees are hereby authorized under section 101(a)(5)(A) of the Marine Mammal Protection Act (MMPA; 16 U.S.C. 1371(a)(5)(A)) to take marine mammals incidental to geophysical survey activities in the Gulf of Mexico, subject to the provisions of the MMPA and the Regulations Governing Taking Marine Mammals Incidental to Geophysical Survey Activities in the Gulf of Mexico (50 CFR Part 217, Subpart S) (Regulations).

1. This Letter of Authorization (LOA) is valid from August 1, 2021, through June 1, 2022.
2. This LOA authorizes take incidental to the specified geophysical survey activities (Big Foot DAS VSP 1) described in the LOA request.
3. General Conditions
 - (a) A copy of this LOA must be in the possession of the Holder of the Authorization (Holder), vessel operator, other relevant personnel, the lead protected species observer (PSO), and any other relevant designees operating under the authority of the LOA.
 - (b) The species and/or stocks authorized for taking are listed in Table 1. Authorized take, by Level A and Level B harassment only, is limited to the species and numbers listed in Table 1.
 - (c) The taking by serious injury or death of any of the species listed in Table 1 or any taking of any other species of marine mammal is prohibited and may result in the modification, suspension, or revocation of this IHA. Any taking exceeding the authorized amounts listed in Table 1 is prohibited and may result in the modification, suspension, or revocation of this IHA.
 - (d) The Holder must instruct relevant vessel personnel with regard to the authority of the protected species monitoring team (PSO team), and must ensure that relevant vessel personnel and PSO team participate in a joint onboard briefing, led by the vessel operator and lead PSO, prior to beginning work to ensure that responsibilities, communication procedures, protected species monitoring protocols, operational procedures, and LOA requirements are clearly understood. This briefing must be repeated when relevant new personnel join the survey operations before work involving those personnel commences.
 - (e) The acoustic source must be deactivated when not acquiring data or preparing to acquire data, except as necessary for testing. Unnecessary use of the acoustic source must be avoided. Notified operational capacity (i.e., total array volume) (not including redundant backup airguns) must not be exceeded during the survey, except where unavoidable for source testing and calibration purposes. All



occasions where activated source volume exceeds notified operational capacity must be communicated to the PSO(s) on duty and fully documented. The lead PSO must be granted access to relevant instrumentation documenting acoustic source power and/or operational volume.

(f) PSO requirements:

- i. LOA-holders must use independent, dedicated, qualified PSOs, meaning that the PSOs must be employed by a third-party observer provider, must have no tasks other than to conduct observational effort, collect data, and communicate with and instruct relevant vessel crew with regard to the presence of protected species and mitigation requirements (including brief alerts regarding maritime hazards), and must be qualified pursuant to section 5(a) of this LOA. Acoustic PSOs are required to complete specialized training for operating passive acoustic monitoring (PAM) systems and are encouraged to have familiarity with the vessel on which they will be working. PSOs may act as both acoustic and visual observers (but not simultaneously), so long as they demonstrate that their training and experience are sufficient to perform each task.
- ii. The Holder must submit PSO resumes for NMFS review and approval prior to commencement of the survey. Resumes should include dates of training and any prior NMFS approval, as well as dates and description of last experience, and must be accompanied by information documenting successful completion of an acceptable training course. NMFS is allowed one week to approve PSOs from the time that the necessary information is received by NMFS, after which PSOs meeting the minimum requirements will automatically be considered approved.
- iii. At least one visual PSO and two acoustic PSOs aboard each acoustic source vessel must have a minimum of 90 days at-sea experience working in those roles, respectively, with no more than eighteen months elapsed since the conclusion of the at-sea experience. One visual PSO with such experience must be designated as the lead for the entire PSO team. The lead must coordinate duty schedules and roles for the PSO team and serve as the primary point of contact for the vessel operator. (Note that the responsibility of coordinating duty schedules and roles may instead be assigned to a shore-based, third-party monitoring coordinator.) To the maximum extent practicable, the lead PSO must devise the duty schedule such that experienced PSOs are on duty with those PSOs with appropriate training but who have not yet gained relevant experience.

4. Mitigation Requirements

(a) Visual monitoring requirements:

- i. During survey operations (i.e., any day on which use of the acoustic source is planned to occur, and whenever the acoustic source is in the water, whether activated or not), a minimum of two PSOs must be on duty and conducting visual observations at all times during daylight hours (i.e., from 30 minutes prior to sunrise through 30 minutes following sunset).
- ii. Visual monitoring must begin not less than 30 minutes prior to ramp-up and must continue until one hour after use of the acoustic source ceases or until 30 minutes past sunset.
- iii. Visual PSOs must coordinate to ensure 360° visual coverage around the vessel from the most appropriate observation posts, and must conduct visual observations using binoculars and the naked eye while free from distractions and in a consistent, systematic, and diligent manner.
- iv. Visual PSOs must immediately communicate all observations of marine mammals to the on-duty acoustic PSO, including any determination by the PSO regarding species identification, distance, and bearing and the degree of confidence in the determination.
- v. Any observations of marine mammals by crew members aboard any vessel associated with the survey must be relayed to the PSO team.
- vi. During good conditions (e.g., daylight hours; Beaufort sea state (BSS) 3 or less), visual PSOs must conduct observations when the acoustic source is not operating for comparison of sighting rates and behavior with and without use of the acoustic source and between acquisition periods, to the maximum extent practicable.
- vii. Visual PSOs may be on watch for a maximum of two consecutive hours followed by a break of at least one hour between watches and may conduct a maximum of 12 hours of observation per 24-hour period. NMFS may grant an exception for LOA applicants that demonstrate such a “two hours on/one hour off” duty cycle is not practicable, in which case visual PSOs will be subject to a maximum of four consecutive hours on watch followed by a break of at least two hours between watches. Combined observational duties (visual and acoustic but not at the same time) must not exceed 12 hours per 24-hour period for any individual PSO.

(b) Acoustic monitoring requirements:

- i. All source vessels must use a towed PAM system at all times when operating in waters deeper than 100 m, which must be monitored by a minimum of one acoustic PSO beginning at least 30 minutes prior to ramp-up, at all times during use of the acoustic source, and until one hour after use of the acoustic source ceases. “PAM system” refers to calibrated

hydrophone arrays with full system redundancy to detect, identify, and estimate distance and bearing to vocalizing cetaceans, coupled with appropriate software to aid monitoring and listening by a PAM operator skilled in bioacoustics analysis and computer system specifications capable of running appropriate software. The PAM system must have at least one calibrated hydrophone (per each deployed hydrophone type and/or set) sufficient for determining whether background noise levels on the towed PAM system are sufficiently low to meet performance expectations. Applicants must provide a PAM plan including description of the hardware and software proposed for use prior to proceeding with any survey where PAM is required.

- ii. Acoustic PSOs must immediately communicate all detections of marine mammals to visual PSOs (when visual PSOs are on duty), including any determination by the PSO regarding species identification, distance, and bearing, and the degree of confidence in the determination.
 - iii. Acoustic PSOs may be on watch for a maximum of four consecutive hours followed by a break of at least two hours between watches, and may conduct a maximum of 12 hours of observation per 24-hour period. Combined observational duties (visual and acoustic but not at the same time) must not exceed 12 hours per 24-hour period for any individual PSO.
 - iv. Survey activity may continue for 30 minutes when the PAM system malfunctions or is damaged, while the PAM operator diagnoses the issue. If the diagnosis indicates that the PAM system must be repaired to solve the problem, operations may continue for an additional two hours without acoustic monitoring during daylight hours only under the following conditions:
 - (A) Sea state is less than or equal to BSS 4;
 - (B) No marine mammals (excluding delphinids) detected solely by PAM in the applicable exclusion zone in the previous two hours;
 - (C) NMFS is notified via email as soon as practicable with the time and location in which operations began occurring without an active PAM system; and
 - (D) Operations with an active acoustic source, but without an operating PAM system, do not exceed a cumulative total of four hours in any 24-hour period.
- (c) PSOs must establish and monitor applicable exclusion and buffer zones. These zones must be based upon the radial distance from the edges of the airgun array

(rather than being based on the center of the array or around the vessel itself). During use of the acoustic source (i.e., anytime the acoustic source is active, including ramp-up), occurrence of marine mammals within the relevant buffer zone (but outside the exclusion zone) should be communicated to the operator to prepare for the potential shutdown of the acoustic source.

- i. Two exclusion zones are defined, depending on the species and context. A standard exclusion zone encompassing the area at and below the sea surface out to a radius of 500 meters from the edges of the airgun array (0-500 m) is defined. For special circumstances (defined at 4(e)(v) of this LOA), the exclusion zone encompasses an extended distance of 1,500 meters (0-1,500 m).
 - ii. During pre-start clearance monitoring (i.e., before ramp-up begins), the buffer zone acts as an extension of the exclusion zone in that observations of marine mammals within the buffer zone would also preclude airgun operations from beginning (i.e., ramp-up). For all marine mammals (except where superseded by the extended 1,500-m exclusion zone), the buffer zone encompasses the area at and below the sea surface from the edge of the 0-500 meter exclusion zone out to a radius of 1,000 meters from the edges of the airgun array (500-1,000 m). The buffer zone is not applicable when the exclusion zone is greater than 500 meters, i.e., the observational focal zone is not increased beyond 1,500 meters.
- (d) A ramp-up procedure, involving a step-wise increase in the number of airguns firing and total active array volume until all operational airguns are activated and the full volume is achieved, is required at all times as part of the activation of the acoustic source. A 30-minute pre-start clearance observation period must occur prior to the start of ramp-up. The Holder must adhere to the following pre-start clearance and ramp-up requirements:
- i. The operator must notify a designated PSO of the planned start of ramp-up as agreed upon with the lead PSO; the notification time should not be less than 60 minutes prior to the planned ramp-up.
 - ii. Ramp-ups must be scheduled so as to minimize the time spent with source activated prior to reaching the designated run-in.
 - iii. A designated PSO must be notified again immediately prior to initiating ramp-up procedures and the operator must receive confirmation from the PSO to proceed.
 - iv. Ramp-up must not be initiated if any marine mammal is within the applicable exclusion or buffer zone. If a marine mammal is observed within the exclusion zone or the buffer zone during the 30-minute pre-start clearance period, ramp-up must not begin until the animal(s) has been

observed exiting the zones or until an additional time period has elapsed with no further sightings (15 minutes for small delphinids and 30 minutes for all other species).

- v. Ramp-up must begin by activating a single airgun of the smallest volume in the array and shall continue in stages by doubling the number of active elements at the commencement of each stage, with each stage of approximately the same duration. Total duration must not be less than 20 minutes. The operator must provide information to the PSO documenting that appropriate procedures were followed.
 - vi. Ramp-up must cease and the source shut down upon observation of marine mammals within the applicable exclusion zone. Once ramp-up has begun, observations of marine mammals within the buffer zone do not require shutdown.
 - vii. Ramp-up may occur at times of poor visibility, including nighttime, if appropriate acoustic monitoring has occurred with no detections of a marine mammal other than delphinids in the 30 minutes prior to beginning ramp-up. Acoustic source activation may only occur at night where operational planning cannot reasonably avoid such circumstances.
 - viii. If the acoustic source is shut down for brief periods (i.e., less than 30 minutes) for reasons other than implementation of prescribed mitigation (e.g., mechanical difficulty), it may be activated again without ramp-up if PSOs have maintained constant visual and/or acoustic observation and no visual or acoustic detections of any marine mammal have occurred within the applicable exclusion zone. For any longer shutdown, pre-start clearance observation and ramp-up are required. For any shutdown at night or in periods of poor visibility (e.g., BSS 4 or greater), ramp-up is required, but if the shutdown period was brief and constant observation maintained, pre-start clearance watch is not required.
 - ix. Testing of the acoustic source involving all elements requires ramp-up. Testing limited to individual source elements or strings does not require ramp-up but does require the pre-start clearance observation period.
- (e) Shutdown requirements:
- i. Any PSO on duty has the authority to delay the start of survey operations or to call for shutdown of the acoustic source pursuant to the requirements of this subpart.
 - ii. The operator must establish and maintain clear lines of communication directly between PSOs on duty and crew controlling the acoustic source to ensure that shutdown commands are conveyed swiftly while allowing

PSOs to maintain watch.

- iii. When both visual and acoustic PSOs are on duty, all detections must be immediately communicated to the remainder of the on-duty PSO team for potential verification of visual observations by the acoustic PSO or of acoustic detections by visual PSOs.
 - iv. When the airgun array is active (i.e., anytime one or more airguns is active, including during ramp-up) and (1) a marine mammal appears within or enters the applicable exclusion zone and/or (2) a marine mammal (excluding delphinids) is detected acoustically and localized within the applicable exclusion zone, the acoustic source must be shut down. When shutdown is called for by a PSO, the acoustic source must be immediately deactivated and any dispute resolved only following deactivation.
 - v. The extended 1,500-m exclusion zone must be applied upon detection (visual or acoustic) of a baleen whale, sperm whale, beaked whale, or *Kogia* spp. within the zone.
 - vi. Shutdown requirements are waived for dolphins of the following genera: *Tursiops*, *Stenella*, *Steno*, and *Lagenodelphis*. If a delphinid is visually detected within the exclusion zone, no shutdown is required unless the PSO confirms the individual to be of a genus other than those listed above, in which case a shutdown is required. Acoustic detection of delphinids does not require shutdown.
 - vii. If there is uncertainty regarding identification or localization, PSOs may use best professional judgment in making the decision to call for a shutdown.
 - viii. Upon implementation of shutdown, the source may be reactivated after the marine mammal(s) has been observed exiting the applicable exclusion zone or following a 30-minute clearance period with no further detection of the marine mammal(s).
- (f) *Entanglement avoidance*. To avoid the risk of entanglement, if conducting surveys using ocean-bottom nodes or similar gear the Holder must:
- i. Use negatively buoyant coated wire-core tether cable;
 - ii. Retrieve all lines immediately following completion of the survey; and
 - iii. Attach acoustic pingers directly to the coated tether cable; acoustic releases should not be used.

- (g) *Vessel strike avoidance.* The Holder must adhere to the following requirements:
- i. Vessel operators and crews must maintain a vigilant watch for all marine mammals and must slow down, stop their vessel, or alter course, as appropriate and regardless of vessel size, to avoid striking any marine mammal. A visual observer aboard the vessel must monitor a vessel strike avoidance zone around the vessel, which shall be defined according to the parameters stated in this subsection. Visual observers monitoring the vessel strike avoidance zone may be third-party observers (i.e., PSOs) or crew members, but crew members responsible for these duties must be provided sufficient training to distinguish marine mammals from other phenomena and broadly to identify a marine mammal as a baleen whale, sperm whale, or other marine mammal;
 - ii. Vessel speeds must be reduced to 10 kn or less when mother/calf pairs, pods, or large assemblages of marine mammals are observed near a vessel;
 - iii. All vessels must maintain a minimum separation distance of 500 m from baleen whales;
 - iv. All vessels must maintain a minimum separation distance of 100 m from sperm whales;
 - v. All vessels must, to the maximum extent practicable, attempt to maintain a minimum separation distance of 50 m from all other marine mammals, with an exception made for those animals that approach the vessel; and
 - vi. When marine mammals are sighted while a vessel is underway, the vessel must take action as necessary to avoid violating the relevant separation distance, e.g., attempt to remain parallel to the animal's course, avoid excessive speed or abrupt changes in direction until the animal has left the area. If marine mammals are sighted within the relevant separation distance, the vessel must reduce speed and shift the engine to neutral, not engaging the engines until animals are clear of the area. This does not apply to any vessel towing gear or any vessel that is navigationally constrained.
 - vii. These requirements do not apply in any case where compliance would create an imminent and serious threat to a person or vessel or to the extent that a vessel is restricted in its ability to maneuver and, because of the restriction, cannot comply.

5. Monitoring Requirements

- (a) PSO qualifications:

- i. PSOs must successfully complete relevant, acceptable training, including completion of all required coursework and passing (80 percent or greater) a written and/or oral examination developed for the training program.
 - ii. PSOs must have successfully attained a bachelor's degree from an accredited college or university with a major in one of the natural sciences, a minimum of 30 semester hours or equivalent in the biological sciences, and at least one undergraduate course in math or statistics. The educational requirements may be waived if the PSO has acquired the relevant skills through alternate experience. Requests for such a waiver must be submitted to NMFS and shall include written justification. Requests will be granted or denied (with justification) by NMFS within one week of receipt of submitted information. Alternate experience that may be considered includes, but is not limited to:
 - (A) secondary education and/or experience comparable to PSO duties;
 - (B) previous work experience conducting academic, commercial, or government-sponsored marine mammal surveys; or
 - (C) previous work experience as a PSO; the PSO should demonstrate good standing and consistently good performance of PSO duties.
- (b) *Equipment.* The Holder is required to:
- i. Provide PSOs with bigeye binoculars (e.g., 25 x 150; 2.7 view angle; individual ocular focus; height control) of appropriate quality solely for PSO use. These must be pedestal-mounted on the deck at the most appropriate vantage point that provides for optimal sea surface observation, PSO safety, and safe operation of the vessel.
 - ii. For each vessel required to use a PAM system, provide a PAM system that has been verified and tested by an experienced acoustic PSO who will be using it during the trip for which monitoring is required;
 - iii. Work with the selected third-party observer provider to ensure PSOs have all equipment (including backup equipment) needed to adequately perform necessary tasks, including accurate determination of distance and bearing to observed marine mammals. (Equipment specified in A. through G. below may be provided by an individual PSO, the third-party observer provider, or the LOA-holder, but the LOA-holder is responsible for ensuring PSOs have the proper equipment required to perform the duties specified herein.) Such equipment, at a minimum, must include:
 - (A) Reticle binoculars (e.g., 7 x 50) of appropriate quality (at least one per PSO, plus backups);

- (B) Global Positioning Unit (GPS) (plus backup);
 - (C) Digital camera with a telephoto lens (the camera or lens should also have an image stabilization system) that is at least 300 mm or equivalent on a full-frame single lens reflex (SLR) (plus backup);
 - (D) Compass (plus backup);
 - (E) Radios for communication among vessel crew and PSOs (at least one per PSO, plus backups); and
 - (F) Any other tools necessary to adequately perform necessary PSO tasks.
- (c) *Data collection.* PSOs must use standardized electronic data forms. PSOs must record detailed information about any implementation of mitigation requirements, including the distance of marine mammals to the acoustic source and description of specific actions that ensued, the behavior of the animal(s), any observed changes in behavior before and after implementation of mitigation, and if shutdown was implemented, the length of time before any subsequent ramp-up or activation of the acoustic source. If required mitigation was not implemented, PSOs must record a description of the circumstances. At a minimum, the following information should be recorded:
- i. Vessel names (source vessel and other vessels associated with survey), vessel size and type, maximum speed capability of vessel, port of origin, and call signs;
 - ii. PSO names and affiliations;
 - iii. Dates of departures and returns to port with port name;
 - iv. Dates of and participants in PSO briefings;
 - v. Dates and times (Greenwich Mean Time) of survey effort and times corresponding with PSO effort;
 - vi. Vessel location (latitude/longitude) when survey effort began and ended and vessel location at beginning and end of visual PSO duty shifts;
 - vii. Vessel location at 30-second intervals (if software capability allows) or 5-minute intervals (if location must be manually recorded);
 - viii. Vessel heading and speed at beginning and end of visual PSO duty shifts and upon any line change;

- ix. Environmental conditions while on visual survey (at beginning and end of PSO shift and whenever conditions changed significantly), including Beaufort sea state and any other relevant weather conditions including cloud cover, fog, sun glare, and overall visibility to the horizon;
- x. Vessel location when environmental conditions change significantly;
- xi. Factors that may have contributed to impaired observations during each PSO shift change or as needed as environmental conditions change (e.g., vessel traffic, equipment malfunctions);
- xii. Survey activity information, such as acoustic source power output while in operation, number and volume of airguns operating in an array, tow depth of an acoustic source, and any other notes of significance (i.e., pre-start clearance, ramp-up, shutdown, testing, shooting, ramp-up completion, end of operations, streamers, etc.); and
- xiii. Upon visual observation of a marine mammal, the following information:
 - (A) Watch status (sighting made by PSO on/off effort, opportunistic, crew, alternate vessel/platform);
 - (B) PSO who sighted the animal and PSO location (including height above water) at time of sighting;
 - (C) Time of sighting;
 - (D) Vessel coordinates at time of sighting;
 - (E) Water depth;
 - (F) Direction of vessel's travel (compass direction);
 - (G) Speed of the vessel(s) from which the observation was made;
 - (H) Direction of animal's travel relative to the vessel;
 - (I) Pace of the animal;
 - (J) Estimated distance to the animal (and method of estimating distance) and its heading relative to vessel at initial sighting;
 - (K) Identification of the animal (e.g., genus/species, lowest possible taxonomic level, or unidentified), PSO confidence in identification, and the composition of the group if there is a mix of species;

- (L) Estimated number of animals (high/low/best);
- (M) Estimated number of animals by cohort (adults, juveniles, group composition, etc.);
- (N) Description (as many distinguishing features as possible of each individual seen, including length, shape, color, pattern, scars or markings, shape and size of dorsal fin, shape of head, and blow characteristics);
- (O) Detailed behavior observations (e.g., number of blows/breaths, number of surfaces, breaching, spyhopping, diving, feeding, traveling; as explicit and detailed as possible; note any observed changes in behavior), including an assessment of behavioral responses to survey activity;
- (P) Animal's closest point of approach (CPA) and/or closest distance from any element of the acoustic source;
- (Q) Platform activity at time of sighting (e.g., deploying, recovering, testing, shooting, data acquisition, other); and
- (R) Description of any actions implemented in response to the sighting (e.g., delays, shutdown, ramp-up) and time and location of the action.

xiv. Upon acoustic detection of a marine mammal using a PAM system, the following information:

- (A) An acoustic encounter identification number, and whether the detection was linked with a visual sighting;
- (B) Date and time when first and last heard;
- (C) Types and nature of sounds heard (e.g., clicks, whistles, creaks, burst pulses, continuous, sporadic, strength of signal); and
- (D) Any additional information recorded such as water depth of the hydrophone array, bearing of the animal to the vessel (if determinable), species or taxonomic group (if determinable), spectrogram screenshot, and any other notable information.

6. Reporting Requirements

- (a) Annual reporting:

- i. The Holder must submit a summary report to NMFS on all activities and monitoring results within 90 days of the completion of the survey or expiration of the LOA, whichever comes sooner, and must include all information described above under section 5(c) of this LOA. If an issued LOA is valid for greater than one year, the summary report must be submitted on an annual basis.
 - ii. The report must describe activities conducted and sightings of marine mammals, must provide full documentation of methods, results, and interpretation pertaining to all monitoring, and must summarize the dates and locations of survey operations and all marine mammal sightings (dates, times, locations, activities, associated survey activities, and information regarding locations where the acoustic source was used). In addition to the report, all raw observational data must be made available to NMFS.
 - iii. For operations requiring the use of PAM, the report must include a validation document concerning the use of PAM, which should include necessary noise validation diagrams and demonstrate whether background noise levels on the PAM deployment limited achievement of the planned detection goals. Copies of any vessel self-noise assessment reports must be included with the report.
 - iv. The Holder must provide geo-referenced time-stamped vessel tracklines for all time periods in which airguns (full array or single) were operating. Tracklines must include points recording any change in airgun status (e.g., when the airguns began operating, when they were turned off). GIS files must be provided in ESRI shapefile format and include the UTC date and time, latitude in decimal degrees, and longitude in decimal degrees. All coordinates must be referenced to the WGS84 geographic coordinate system.
 - v. The draft report must be accompanied by a certification from the lead PSO as to the accuracy of the report, and the lead PSO may submit directly to NMFS a statement concerning implementation and effectiveness of the required mitigation and monitoring.
 - vi. A final report must be submitted within 30 days following resolution of any comments on the draft report.
- (b) *Comprehensive reporting.* The Holder must contribute to the compilation and analysis of data for inclusion in an annual synthesis report addressing all data collected and reported through annual reporting in each calendar year. The synthesis period shall include all annual reports deemed to be final by NMFS in a given one-year reporting period. The report must be submitted to NMFS within

90 days following the end of a given one-year reporting period.

(c) Reporting of injured or dead marine mammals:

- i. In the event that personnel involved in the survey activities discover an injured or dead marine mammal, the Holder must report the incident to the Office of Protected Resources (OPR), NMFS and to the Southeast Regional Stranding Network as soon as feasible. The report must include the following information:
 - (A) Time, date, and location (latitude/longitude) of the first discovery (and updated location information if known and applicable);
 - (B) Species identification (if known) or description of the animal(s) involved;
 - (C) Condition of the animal(s) (including carcass condition if the animal is dead);
 - (D) Observed behaviors of the animal(s), if alive;
 - (E) If available, photographs or video footage of the animal(s); and
 - (F) General circumstances under which the animal was discovered.
- ii. In the event of a ship strike of a marine mammal by any vessel involved in the survey activities, the LOA-holder must report the incident to OPR, NMFS and to the Southeast Regional Stranding Network as soon as feasible. The report must include the following information:
 - (A) Time, date, and location (latitude/longitude) of the incident;
 - (B) Species identification (if known) or description of the animal(s) involved;
 - (C) Vessel's speed during and leading up to the incident;
 - (D) Vessel's course/heading and what operations were being conducted (if applicable);
 - (E) Status of all sound sources in use;
 - (F) Description of avoidance measures/requirements that were in place at the time of the strike and what additional measures were taken, if any, to avoid strike;

- (G) Environmental conditions (e.g., wind speed and direction, Beaufort sea state, cloud cover, visibility) immediately preceding the strike;
- (H) Estimated size and length of animal that was struck;
- (I) Description of the behavior of the marine mammal immediately preceding and following the strike;
- (J) If available, description of the presence and behavior of any other marine mammals immediately preceding the strike;
- (K) Estimated fate of the animal (e.g., dead, injured but alive, injured and moving, blood or tissue observed in the water, status unknown, disappeared); and
- (L) To the extent practicable, photographs or video footage of the animal(s).

7. Actions to Minimize Additional Harm to Live-Stranded (or Milling) Marine Mammals

- (a) In the event of a live stranding (or near-shore atypical milling) event within 50 km of the survey operations, where the NMFS stranding network is engaged in herding or other interventions to return animals to the water, the Director of OPR, NMFS (or designee) will advise the Holder of the need to implement shutdown procedures for all active acoustic sources operating within 50 km of the stranding. Shutdown procedures for live stranding or milling marine mammals include the following:
 - i. If at any time, the marine mammal(s) die or are euthanized, or if herding/intervention efforts are stopped, the Director of OPR, NMFS (or designee) will advise the LOA-holder that the shutdown around the animals' location is no longer needed.
 - ii. Otherwise, shutdown procedures will remain in effect until the Director of OPR, NMFS (or designee) determines and advises the LOA-holder that all live animals involved have left the area (either of their own volition or following an intervention).
 - iii. If further observations of the marine mammals indicate the potential for re-stranding, additional coordination with the LOA-holder will be required to determine what measures are necessary to minimize that likelihood (e.g., extending the shutdown or moving operations farther away) and to implement those measures as appropriate.
- (b) If NMFS determines that the circumstances of any marine mammal stranding found in the vicinity of the activity suggest investigation of the association with

survey activities is warranted, and an investigation into the stranding is being pursued, NMFS will submit a written request to the LOA-holder indicating that the following initial available information must be provided as soon as possible, but no later than 7 business days after the request for information. In the event that the investigation is still inconclusive, the investigation of the association of the survey activities is still warranted, and the investigation is still being pursued, NMFS may provide additional information requests, in writing, regarding the nature and location of survey operations prior to the time period above.

- i. Status of all sound source use in the 48 hours preceding the estimated time of stranding and within 50 km of the discovery/notification of the stranding by NMFS; and
 - ii. If available, description of the behavior of any marine mammal(s) observed preceding (i.e., within 48 hours and 50 km) and immediately after the discovery of the stranding.
8. This Authorization may be modified, suspended or revoked if the Holder fails to abide by the conditions prescribed herein (including, but not limited to, failure to comply with monitoring or reporting requirements), or if NMFS determines: (1) the authorized taking is likely to have or is having more than a negligible impact on the species or stocks of affected marine mammals, or (2) the prescribed measures are likely not or are not effecting the least practicable adverse impact on the affected species or stocks and their habitat.

Catherine Marzin
Acting Director,
Office of Protected Resources,
National Marine Fisheries Service.

Table 1. Authorized Incidental Take.

Common name	Scientific name	Level A harassment	Level B harassment
Bryde's whale	<i>Balaenoptera edeni</i>	0	0
Sperm whale	<i>Physeter macrocephalus</i>	0	673
Pygmy/Dwarf sperm whale	<i>Kogia</i> spp.	7	248
Beaked whales	<i>Ziphius cavirostris/ Mesoplodon</i> spp.	0	3,423
Rough-toothed dolphin	<i>Steno bredanensis</i>	0	491
Bottlenose dolphin	<i>Tursiops truncatus</i>	0	2,154
Clymene dolphin	<i>Stenella clymene</i>	0	1,552
Atlantic spotted dolphin	<i>Stenella frontalis</i>	0	834
Pantropical spotted dolphin	<i>Stenella attenuata</i>	0	8,521
Spinner dolphin	<i>Stenella longirostris</i>	0	1,618
Striped dolphin	<i>Stenella coeruleoalba</i>	0	642
Fraser's dolphin	<i>Lagenodelphis hosei</i>	0	188
Risso's dolphin	<i>Grampus griseus</i>	0	429
Melon-headed whale	<i>Peponocephala electra</i>	0	1,008
Pygmy killer whale	<i>Feresa attenuata</i>	0	248
False killer whale	<i>Pseudorca crassidens</i>	0	361
Killer whale	<i>Orcinus orca</i>	0	7
Short-finned pilot whale	<i>Globicephala macrorhynchus</i>	0	251

Appendix B: Environmental Monitoring Plan

CHEVRON BIG FOOT DAS VSP L21-014

**Environmental Management Plan: Marine Mammal and Sea Turtle
Monitoring, Mitigation, and Reporting**



Version 1
Version 1
September 14, 2021

CHEVRON BIG FOOT DAS VSP

Environmental Management Plan: Marine Mammal and Sea Turtle Monitoring, Mitigation, and Reporting

With reference to the Biological Opinion (BO) issued by the National Marine Fisheries Service on March 13, 2020, the National Marine Fisheries Service (NMFS) Letter of Authorization (LOA) and the Bureau of Ocean Energy Management (BOEM) survey permit L21-014

Revision		
Date	Version	Revision made
14/09/2021	1	First Draft issued to Chevron
15/09/2021	2	Chevron clarifications and edits

Approval for issue

Stephanie Milne

Contents

1	INTRODUCTION	3
1.1	Applicable Regulatory Documents and Permits.....	3
2	MARINE PROTECTED SPECIES	3
3	PROTECTED SPECIES OBSERVERS AND PASSIVE ACOUSTIC MONITORING OPERATORS	3
3.1	Staffing Plan	3
3.2	Roles and Responsibilities	4
3.3	PSO and PAM Operator Requirements	5
4	MONITORING EQUIPMENT	5
4.1	Visual Monitoring Equipment	5
4.2	Acoustic Monitoring Equipment.....	5
4.2.1	Passive Acoustic Monitoring (PAM) System	5
4.2.2	PAM JSA and PAM deployment and retrieval procedure.....	5
4.2.3	Distance estimation of acoustic detections.....	5
5	VISUAL AND ACOUSTIC MONITORING PROCEDURES	6
5.1	Visual Monitoring Watches.....	6
5.2	Passive Acoustic Monitoring Watches	6
5.2.1	Procedures for PAM System Malfunction	7
6	PROJECT BRIEFING	7
7	MITIGATION PROCEDURES: STRIKE AVOIDANCE	7
7.1	Strike Avoidance Monitoring and Vessel Maneuvering	7
7.2	Vessel Speed Restrictions	7
7.3	Separation Distances	8
8	MITIGATION PROCEDURES: SOUND SOURCES	8
8.1	Source Operation Area	8
8.2	Sound Source Exclusion Zones and Buffer Zones	9
8.3	Delays to Initiation of the Seismic Source.....	10
8.4	Ramp Up Procedure and Testing.....	10
8.5	Protected Species Shutdown Procedures	11
8.6	Short Breaks in Source Operations.....	11
8.6.1	Daylight Operations	11
8.6.2	Nighttime Operations	12
8.7	Non-acquisition and Non-Testing Source Activity.....	12
9	REPORTING	12
9.1	Incident Reporting	12
9.1.1	Potential Non-Compliance Incidents.....	12
9.1.2	Reporting A Non-functioning PAM System During Seismic Operations.....	12
9.1.3	Injured or Dead Protected Species Reporting	13
9.2	Daily Progress, Interim and Final Reporting	13
9.2.1	Daily Progress Reports	13
9.2.2	Interim Reports	13
9.2.3	Final Report	14

Appendices

APPENDIX A PAM EQUIPMENT SPECIFICATIONS

1 INTRODUCTION

Chevron has contracted the Sanco Atlantic M/V owned and operated by Sanco Holding AS to conduct a Distributed Acoustic Sensing (DAS) 3-D vertical seismic profile (VSP) geophysical survey within the Gulf of Mexico Green Canyon and Walker Ridge area.

In an effort to minimize the potential impacts of seismic operations on certain protected species, including marine mammals and sea turtles, the Bureau of Ocean Energy Management (BOEM), the National Marine Fisheries Service (NMFS), and the Bureau of Safety and Environmental Enforcement (BSEE), have outlined monitoring, mitigation, and reporting procedures that survey operators and permit holders are expected to implement during their seismic survey operations.

1.1 Applicable Regulatory Documents and Permits

Protected species monitoring, mitigation and reporting procedures that are applicable to the VSP operations are contained in the following regulatory documents:

1. The Biological Opinion (BO) issued by the NMFS on March 13, 2020, where Protected Species Observer (PSO) procedures are outlined in detail in the revised Appendix A
2. The survey permit issued by BOEM, permit L21-014
3. The Letter of Authorization (LOA) issued by the NMFS that is valid from 01 August 2021 to 01 June 2022.

This document, the Environmental Management Plan (EMP), prepared by RPS on behalf of Chevron, describes how monitoring, mitigation, and reporting measures for protected species will be executed during the Vertical Seismic Profile (VSP) survey program to maintain compliance with the regulatory requirements in the 2020 Gulf of Mexico Biological Opinion and its appendices, the BOEM survey permit and the NMFS LOA.

2 MARINE PROTECTED SPECIES

Marine protected species or protected species refers to any marine species for which dedicated monitoring and mitigation procedures will be implemented, including:

- All marine mammals
- All sea turtles
- Gulf sturgeon, oceanic white-tipped shark, giant manta ray*

*Note that strike avoidance procedures apply to these ESA listed species but monitoring and sound source mitigation procedures do not need to be implemented.

3 PROTECTED SPECIES OBSERVERS AND PASSIVE ACOUSTIC MONITORING OPERATORS

3.1 Staffing Plan

A team of three Protected Species Observers (PSOs), supplied by RPS, will be onboard the vessel to undertake day-time visual watches, implement mitigations, conduct data collection and reporting in accordance with the BO, LOA and the survey permit.

A team of four Passive Acoustic Monitoring (PAM) Operators will conduct 24-hour PAM monitoring onboard the vessel, implement mitigations, and conduct data collection and reporting in accordance with the BO, the LOA and the survey permit.

3.2 Roles and Responsibilities

Lead PAM Operator

- Maintain copies of the regulatory documents including the LOA and the BOEM survey permit as well as the most up-to-date version of the EMP
- Install and operate PAM as required, including permit to work and task-based risk assessment
- Communicate with seismic operator to delay or shutdown operations
- Acoustically detect and identify protected species in accordance with regulatory requirements
- Organize and maintain appropriate monitoring schedules
- Monitor seismic operations for compliance to the regulatory requirements
- Prepare required reports (with lead PSO)
- Support visual watches when possible

Lead PSO

- Coordinate and oversee PAM and PSO Operations and ensure compliance with monitoring requirements
- Visually monitor, detect, and identify protected species, as well as determine distance from source.
- Record and report protected species sightings, survey activities, and environmental conditions, per regulations
- Monitor and advise on sound source and vessel operations for compliance with the environmental requirements for the survey
- Communicate with the crew to implement mitigation actions as required by environmental protocols
- Participate in daily operation meeting with crew when appropriate

PSO

- Visually monitor, detect, and identify protected species
- Record and report according to survey plan
- Monitor and advise on sound source and vessel operations for compliance with the environmental requirements for the survey plan
- Communicate with the crew to implement mitigation actions as required by environmental protocols
- Participate in daily operation meeting with crew when appropriate

PAM Operators

- Acoustically monitor, detect, and identify marine mammals and determine distance to source
- Record and report marine mammal sightings, survey activities and environmental conditions, per regulations
- Monitor and advise on sound source and vessel operations for compliance with the environmental requirements for the survey
- Assist in maintaining and troubleshooting the PAM system hardware and software
- Communicate with the crew to implement mitigation actions as required by environmental protocols, including delays to initiation of survey equipment
- Participate in daily meetings and drills with crew when appropriate

3.3 PSO and PAM Operator Requirements

All Protected Species Observers (PSOs) and PAM Operators will have completed a protected species observer training program as described in the BO.

PAM Operators will have completed a PAM training course as described in the BO.

PSOs' and PAM Operators' CVs will be submitted to NMFS for approval prior to deployment on the project via nmfs.psoreview@noaa.gov.

4 MONITORING EQUIPMENT

4.1 Visual Monitoring Equipment

The PSOs on duty will monitor for marine protected species using the naked eye, hand-held reticle binoculars, and big-eye binoculars as described in BO.

Digital single-lens reflex camera equipment, including zoom lens, will be used to record sightings and verify species identification.

4.2 Acoustic Monitoring Equipment

4.2.1 Passive Acoustic Monitoring (PAM) System

The PAM system is designed to provide a flexible approach to the monitoring for marine mammals using a towed hydrophone system. The system uses PAMGUARD software modules such that the optimum system can be configured for the application, vessel, and deployment method. PAM software modules will be configured for the application, vessel, and deployment method.

The source vessel will have two acoustic monitoring systems on board, a primary system installed and monitored by the PAM Operator and an identical secondary system available as back-up should any issues be encountered with the main system.

The PAM system has been designed to monitor for most cetacean species found in the Gulf of Mexico, covering a broad range of frequencies up to 200kHz. The predominant vessel noise (propellers) will automatically be filtered out because the hydrophone will only begin to pick up frequencies at 2 kHz. Some propeller and engine noise will still dominate the lower frequencies, but the species of concern should all be detectable above the noise as their dominant frequencies are around the 8 to 20 kHz ranges.

Mid and high frequency marine mammal vocalizations are processed by the laptop internal sound card. Mid frequency vocalizations include sperm whale click trains and codas and delphinid whistles in the frequency range of approximately 2 kHz to 24 kHz. Kogia species, beaked whales, and delphinid echolocation clicks that are emitted at very high frequencies in excess of 80kHz are processed by a specialized sound card in the buffer unit, an external National Instruments sound card, capable of sampling audio at 500 kHz. PAM equipment specifications are provided in Appendix A.

4.2.2 PAM JSA and PAM deployment and retrieval procedure

A job safety analysis (JSA) will be completed prior to hydrophone deployment. The Lead PAM Operator will develop, in cooperation with the vessel crew, a vessel-specific deployment and retrieval procedure that considers both the minimization of entanglement risks with other towed equipment while maximizing the acoustic range of the system.

4.2.3 Distance estimation of acoustic detections

There are a variety of methods that can be used to estimate the distance to vocalizing marine mammals using the acoustic detection software, PAMGuard, each of which rely on vocalizations being identified/detected on more than one hydrophone where the time of arrival of the signal to each hydrophone can be compared and a distance to the vocalizing animal can be triangulated over time.

When the distance to a vocalizing animal cannot be determined by PAMGuard, the experienced PAM Operator can make a distance estimation assisted by the noise or detection score system developed by Gannier et al. (2002). Gannier et al. monitored sperm whales in the Mediterranean both visually and acoustically. A scale was developed based upon the strength or intensity of the sperm whale clicks at various distances that were then measured when the sperm whales surfaced and were visually observed. Although the scale is subjective, and sounds produced in marine environments will vary according to local conditions, the scale provides a measure for approximating distances when using a single, linear hydrophone array.

5 VISUAL AND ACOUSTIC MONITORING PROCEDURES

5.1 Visual Monitoring Watches

There will be **at least two PSOs on visual watch** during:

- All seismic source activity in daylight hours, including testing
- During search periods prior to activating the seismic source
- **For the duration of any day when there is planned acoustic source activity, regardless of whether the source is deployed**

When the above conditions are not met, such as days when no source activity is planned, there will still be at least one PSO on watch at all times, whenever the monitoring conditions are defined as “good”, (good conditions are defined in the BO as Beaufort sea state of 3 or less). This includes transits to and from the permitted area of operations. The only time that there will be no PSO on watch would be in a situation where the vessel crew have indicated that there is no planned source activity AND it is not safe for the PSOs to stand watch.

Visual monitoring will begin 30 minutes before sunrise and continue until 30 minutes after sunset.

The following guidelines will apply to these watch periods:

- No additional duties may be assigned to the PSO during his/her visual observation watch
- No PSO will be allowed more than **two consecutive hours on watch** before being allocated a one-hour break from visual monitoring
- No PSO will be assigned a combined watch schedule of more than 12 hours in a 24-hour period

The PSOs will stand watch in a suitable location that will not interfere with the navigation or operation of the vessel and affords an optimal view of the sea surface. PSOs will maintain 360° coverage surrounding the vessel and the seismic source.

If a protected species is observed, the PSO should first take care of any necessary mitigation actions, or if no mitigation actions are required, they will note and monitor the position (including latitude/longitude of the vessel and relative bearing and estimated range to the animal) until the animal dives or moves out of visual range of the observer.

5.2 Passive Acoustic Monitoring Watches

Passive acoustic monitoring will be conducted, day and night, during all uses of the seismic sources AND during the search periods prior to activation of the seismic sources.

During acoustic monitoring watches, the following guidelines shall be followed:

- No additional duties may be assigned to the PAM Operator during their acoustic monitoring watch
- No PAM Operator will be allowed more than **four consecutive hours of acoustic monitoring** before they will be allocated a break of two hours

- No person on watch as a PSO or PAM Operator will be assigned a combined watch schedule of more than 12 hours in a 24-hour period

Acoustic monitoring must be consistent, diligent, and free of distractions for the duration of the watch.

5.2.1 Procedures for PAM System Malfunction

In the event that a PAM system is not functional for the purposes of mitigation monitoring, whether because of malfunction with the cables, electronics, monitoring software or another issue, the PAM Operator is permitted **30 mins to diagnose the issue** without the need to shut down the source array.

During daylight when PSOs are also on watch, an additional 2 hours is permitted to conduct repairs, where seismic operations can continue during that time **if all the following conditions are met:**

1. The sea state at the time of the malfunction is B4 or less. AND
2. There were no acoustic-ONLY detections of marine mammals other than delphinids inside the applicable EZ in the 2 hours preceding the malfunction.

Operations conducted without ongoing acoustic monitoring **may not exceed a total of 4 hours in a 24-hour period.**

NMFS and BSEE must be notified as soon as is practicable of any PAM system malfunctions exceeding 30 minutes in duration that occur while acoustic source operations are ongoing. Reporting procedures are outlined in the Reporting section of this EMP.

6 PROJECT BRIEFING

The vessel crew and PSO / PAM team should participate in a project briefing that includes communication procedures, monitoring requirements and operating protocols.

The briefing should be repeated every time relevant new personnel join the vessel before operations begins.

7 MITIGATION PROCEDURES: STRIKE AVOIDANCE

7.1 Strike Avoidance Monitoring and Vessel Maneuvering

Vessel operators must maintain a vigilant watch for all aquatic protected species.

Vessels must slow down, stop their vessel, or alter course, as appropriate and regardless of vessel size, to avoid striking any protected species:

- All marine mammals
- All sea turtles
- Gulf sturgeon, oceanic white-tipped shark, giant manta ray

These procedures apply to physical interactions involving vessels and the towed equipment.

7.2 Vessel Speed Restrictions

Vessel speeds must be reduced to 10 knots or less **when mother/calf pairs, pods, or large assemblages (greater than three) of any marine mammal** are observed near a vessel.

7.3 Separation Distances

When protected species are sighted while a vessel is underway, the vessel should take action as necessary to avoid violating the relevant separation distance (e.g., attempt to remain parallel to the animal's course, avoid excessive speed or abrupt changes in direction until the animal has left the area).

If marine protected species are sighted within the relevant separation distance, the vessel should reduce speed and shift the engine to neutral, not engaging the engines until animals are clear of the area. This does not apply to any vessel that is towing gear. **Vessels are not required to shift into neutral for animals that approach the vessel.**

500 m: All baleen whales including the Bryde's whale

100 m: Sperm whales


50 m: All other marine mammals (including manatees), and sea turtles, and the ESA-listed fish species referenced in 7.1

NOTE: Any large whale for which species can't be identified should be mitigated for as a baleen whale.

8 MITIGATION PROCEDURES: SOUND SOURCES

8.1 Source Operation Area

All source operations on the BOEM lease must be conducted inside of the operational/activity area.

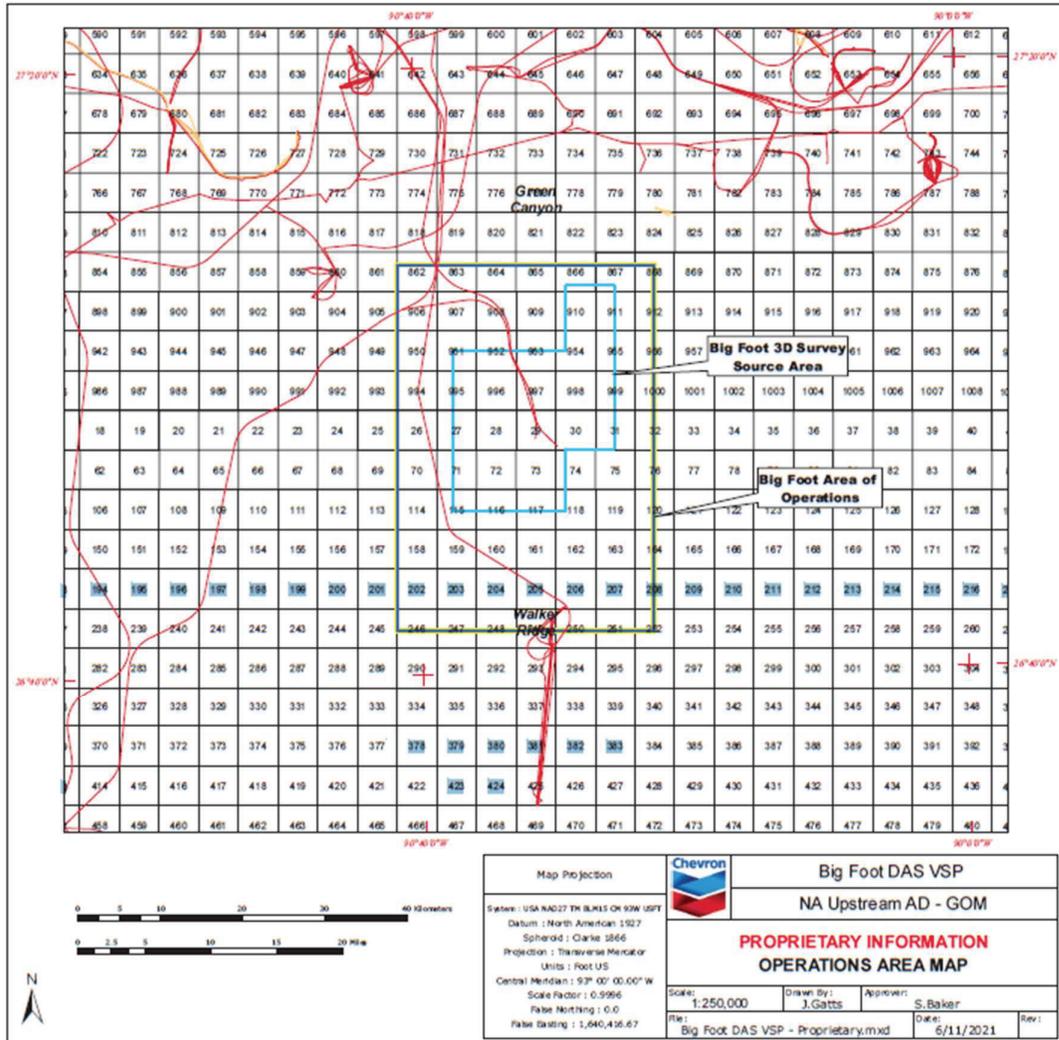

8.2 Sound Source Exclusion Zones and Buffer Zones

Two types of zones will be established around the seismic sources, both radii that extend from the outer edge of the airgun array.

Buffer Zones (BZ): Applicable during the pre-clearance search periods conducted prior to initiating the sound source from silence, where detections of a protected species inside it's applicable BZ during the search will result in a delay to activating the source

- **1500 meters:** All true whale species (Bryde's whale, sperm whales, Kogia species and all beaked whales)
- **1000 meters:** All other marine mammals and sea turtles

Exclusion Zones (EZ): Applicable once the source has been activated, where detections of a protected species inside it's applicable EZ will result in a shutdown of the sound source.

- **1500 meters:** All true whale species (sperm whales, Kogia species and all beaked whales)
- **500 meters:** All other marine mammals
- **100 meters:** A 10 shot turtle pause shall be implemented for any turtles within 100 meters of the ship, such that the turtle is greater than 200m from array upon resumption of source activity Visual and Acoustic Pre-clearance Search Periods

To activate the sound source, a minimum of a 30-minute search period must be conducted.

During the daytime, the search will be conducted visually by the PSOs and acoustically by the PAM Operator.

During nighttime, the search will be conducted acoustically by the PAM Operator.

PSO and PAM on watch should be notified of the intent to turn on the source from silence, either to conduct a ramp-up or for testing, at least 60 minutes prior to the planned start,

8.3 Delays to Initiation of the Seismic Source

If any marine mammal or sea turtle was detected inside its respective Buffer Zone during the 30-minute search period, initiation of the seismic source must be delayed until:

- When all marine protected species that were observed inside the relevant Buffer Zone have been confirmed by the visual observer to have exited the relevant Buffer Zone.
- 15 minutes from last detection for small odontocetes if not observed exiting the BZ
- 30 minutes from last detection for all other protected species, including sea turtles, if not observed exiting the BZ
- 30 minutes from last detection for acoustic-only detections

NOTE: Both the 30-minute pre-clearance search period and the mandatory delay for animals not seen exiting the buffer zone must be completed before source initiation, but the pre-clearance search and delays can be implemented concurrently (they overlap). For a delay period that ends BEFORE the clearance search period is completed, the BZ will be cleared when the clearance search is completed. For a delay period that ends AFTER the standard clearance search period is completed, the source can be turned on when the delay period is completed.

8.4 Ramp Up Procedure and Testing

The intent of ramp-up is to warn marine mammals and sea turtles of pending seismic operations and to allow sufficient time for those animals to leave the immediate vicinity.

For all acoustic source activity, including source testing involving more than one airgun element, ramp-up procedures must be conducted to allow marine mammals and sea turtles to depart the exclusion zone before surveying begins.

Ramp-up is not required for testing of single elements or strings, but they require the pre-start clearance observation period to be completed.

Ramp-up should be planned in an effort to minimize time that the source is active on the run in to the start of the survey line.

Acoustic source activation may only occur at times of poor visibility (including night) where operational planning cannot reasonably avoid such circumstances.

Ramp-up procedures are as follows:

- Visually and acoustically (day) or acoustically (night) monitor the buffer zone and adjacent waters for the absence of marine mammals and sea turtles for at least 30 minutes before initiating ramp-up procedures.
- If no protected species are visually or acoustically detected inside their respective BZs, ramp-up procedures may begin. If animals are detected, refer to Procedures to clear the BZs prior to start of source operations.
- Seismic personnel confirm with PSOs on watch (daytime) and/or PAM Operator (day and night) that the BZs are clear of protected species.
- Ramp-up begins by activating a single airgun of the smallest volume in the array.

- Continue ramp-up in stages by doubling the number of active elements at the commencement of each stage, with each stage of approximately the same duration.
- Total duration of the ramp-up should not be less than 20 minutes.

8.5 Protected Species Shutdown Procedures

If any **marine mammal** is detected visually or acoustically within its EZ, an immediate shutdown of the seismic source is required.

The shutdown requirement is waived under the following circumstances:

1. Shut down is not required for dolphins of the following genera: *Tursiops*, *Stenella*, *Steno*, and *Lagenodelphis*.
2. Shut down is not required for acoustic detections of delphinids inside the EZ unless the PSO or PAM Operator can confirm that the dolphin(s) present are from a different genus than those listed above.

If there is uncertainty regarding identification (i.e., whether the observed marine mammal(s) belongs to one of the delphinid genera for which shutdown is waived or one of the species with a larger exclusion zone), visual PSOs should use best professional judgment in making the decision to call for a shutdown.

The vessel operator must comply immediately with any shut-down request made by a PSO or PAM Operator. Any discussion can occur only after the shutdown has been implemented.

Subsequent restart of seismic source may only occur following clearance of the EZ of all marine protected species under the following conditions:

- When all other marine mammals have been confirmed by the visual observer to have been seen exiting the relevant EZ (not BZ)
OR
When a marine mammal was not observed exiting the EZ, an additional 30 minutes has elapsed following the last detection inside the EZ.

NOTE: All resumptions of source activity following a protected species shutdown must begin with a ramp-up

8.6 Short Breaks in Source Operations

8.6.1 Daylight Operations

In recognition of occasional short periods of silence for a variety of reasons other than for mitigation, during daylight operations, the seismic source may be silenced for periods of time not exceeding 30 minutes in duration and may be restarted at the same volume for operations without a ramp-up if:

1. Visual and acoustic monitoring (daytime) and acoustic monitoring (nighttime) is continued diligently through the silent period

AND

2. No marine protected species are visually observed in their respective EZ during the silent period, and no acoustic detections made **at any distance**

NOTE: Procedures for returning to full volume without ramp up after silent periods also apply to returning to full volume from reduced volume.

For example, if two of three strings were silenced from full volume for the purpose of testing single strings, and testing was completed in less than 30 minutes, the array could return to full volume without a ramp-up provided that the conditions described above were met.

However, if the source were operating at that reduced volume for more than 30 minutes, **a ramp up would be required to return to full volume.**

8.6.2 Nighttime Operations

All breaks in source operation at night that are longer than a few minutes require a ramp-up to resume operations. Examples of operational situations that do not require a ramp-up (provided that the silent period is still only a few minutes) include missed shot-points, noise file collection or silent periods occurring at the end of a survey line when the airgun controller system is being changed over to a new operation mode.

8.7 Non-acquisition and Non-Testing Source Activity

The acoustic source should be deactivated when not acquiring data or preparing to acquire data, except as necessary for testing. Unnecessary use of the acoustic source shall be avoided.

9 REPORTING

9.1 Incident Reporting

9.1.1 Potential Non-Compliance Incidents

The Lead PSO or Lead PAM Operator verbally informs vessel Party Manager and on-board Chevron Client Representative of any potential compliance related issues immediately. The Lead PSO/PAM Operator also informs the RPS Project Manager immediately of all potential non-compliance events.

If the issue can be resolved between the Lead PSO/PAM Operator, Client Representative and Party Manager, the lead PSO/PAM Operator will document in writing the compliance issue and the agreed-upon practices for minimizing future non-compliance incidents of the same nature. The party manager and QC Representative review and approve, and the statement is submitted to the following distribution list:

RPS Project Manager
Scott Baker, Chevron Project Manager

The representatives listed above will distribute any pertinent information resulting from the incident to their respective crews as deemed necessary and appropriate.

If the issue cannot be resolved at the vessel level, Chevron and RPS will discuss and determine the appropriate future actions to be taken. When a common position is reached, notification of the agreed procedures will be distributed by Chevron to vessel crew and by RPS to the PSOs and PAM Operators.

If an agreement cannot be reached at the office level, a Chevron representative will contact BOEM/NMFS/BSEE for clarification. Results from the clarification will be distributed by Chevron.

9.1.2 Reporting A Non-functioning PAM System During Seismic Operations

The PAM Operator on duty will notify by email, NMFS (nmfs.psoreview@noaa.gov) and BSEE (protectedspecies@bsee.gov) as soon as is practicable of any PAM system malfunctions exceeding 30 minutes in duration that occur while acoustic source operations are ongoing.

The PAM Operator will copy the RPS PM.

The notification will include the vessel name, the time and location (GIS position) in which the PAM system ceased function where seismic operations continued. The template for this email will be provided by the RPS PM.

The PAM Operator will also notify by email:

- The vessel Party Chief
- The Client Representative

9.1.3 Injured or Dead Protected Species Reporting

1. The PSO on watch will report the sightings of a dead and/or injured marine species to the Lead PSO, the RPS project manager, on board client representative and vessel Party Chief as soon as possible after the sighting.
2. A PSO, either the Lead or the PSO that observed the dead/injured animal, will report the sighting to the NMFS stranding hotline. This will occur as soon as practicably possible but no more than 24 hours of the detection. The shore-based RPS Project Manager may collect the data and assist with the initial phone report.
3. A written report will be prepared including any photos taken of the animal and sent to RPS as soon as possible.
4. The RPS office will submit the written report to the following distribution list within 12 hours of the detection for review:

On-board:

- Onboard Party Chief
- Client Representative

On-shore:

- Chevron Project Manager
- Sanco Atlantic Project Manager

RPS will provide the written report, once the draft has been reviewed and approved per above, to NOAA, NMFS, and BOEM with Chevron included in copy.

Unless otherwise directed by BOEM, NOAA Fisheries, or NOAA, the dead or injured marine mammal or sea turtle SHOULD NOT be touched! Dead and injured marine mammals and sea turtles are still protected by the ESA and the MMPA and touching the animals in any manner is considered harassment and is punishable by law.

9.2 Daily Progress, Interim and Final Reporting

9.2.1 Daily Progress Reports

A daily report will be completed and submitted to the Party chief, onboard client representative and RPS project manager. The template will be provided by RPS. Chevron will be provided with the draft to review and provide comments.

9.2.2 Interim Reports

RPS will submit interim reports in the format of an excel spreadsheet for each vessel containing the required information listed in the BO.

RPS will submit interim reports (a dataset in a format approved by NMFS and BSEE) on the 1st of each month to BSEE (protectedspecies@bsee.gov).

9.2.3 Final Report


RPS will develop a final report summarizing the survey activities and all PAM / PSO observations. The report will contain all the data required to meet the requirements of the BO.

The RPS Project Manager will provide the draft final report to the Chevron Project Manager within 45 days of project completion.

A.1 Passive Acoustic Monitoring (PAM) Equipment

The PAM equipment comprises the following items:

- 250m Hydrophone Array Cable containing 2 Low Frequency hydrophones (10Hz to 24kHz), 2 Ultra Broadband hydrophones (200Hz to 200kHz), and 2 Broadband hydrophones (2kHz to 200kHz)
- 100m deck cable
- Electronic data capture and processing unit including:
 - Headphones RF transmitter
 - Fireface audio interface
 - Rackmount PC
 - Buffer interface unit
- Integral screen and keyboard
- Backup System

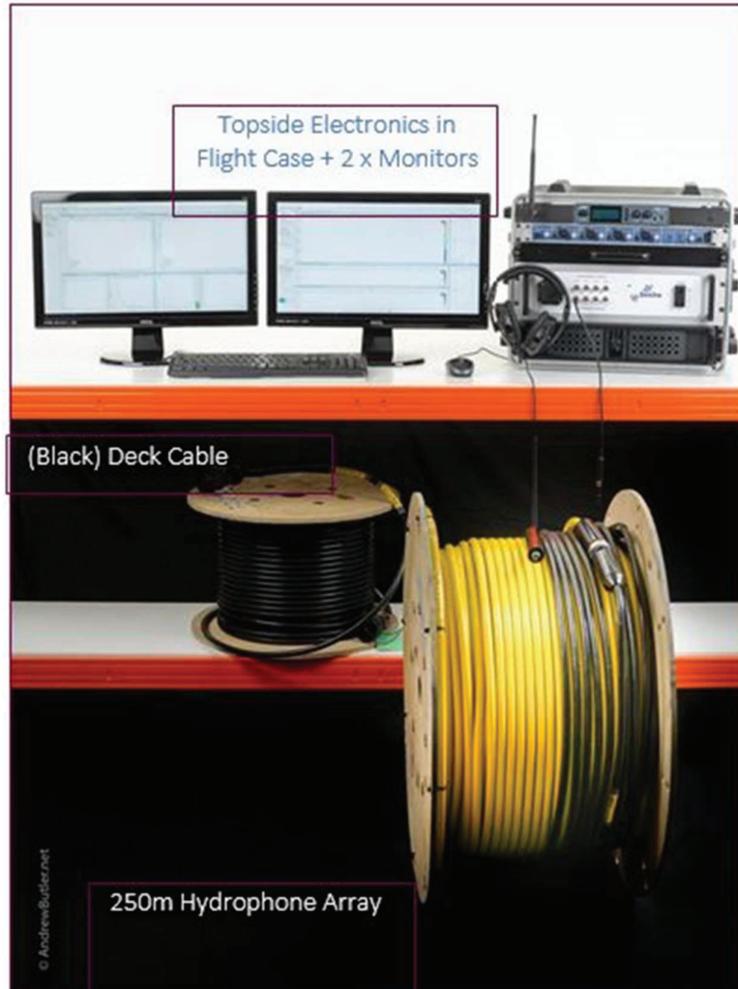


A.2 6 Hydrophone Array

The array includes six hydrophones arranged in three pairs of identical specification with appropriate physical separation to provide direction finding (bearings) to marine mammals and localization using Target Motion Analysis (TMA).

- The front pair (H1 and H2, 8m separation) consists of two “Low Frequency” hydrophones with a response of 10 Hz to 24 KHz.
- The middle pair (H3 and H4, 2m separation) consists of two “Broadband” hydrophones with a response of 200 Hz to 200 kHz.
- The rear pair (H5 and H6, 0.25m separation) consists of two “Standard” hydrophones with a response of 2 kHz to 200 kHz.

The “Low Frequency” hydrophones are configured to detect very low frequency vocalizations while the “Broadband” and “Standard” hydrophones are configured to detect low-mid frequency and mid-high vocalizations respectively. These three pairs of hydrophones provide the capability to detect the full range of marine mammal vocalizations anticipated to be encountered.

Simulation exercises have been completed using the PAMGuard software to verify that the within-pair separation provides consistently accurate bearings to a range of marine mammal vocalizations. Test signals used in these exercises simulated right whale up-calls, broadband sperm whale clicks, delphinid whistles, and narrow band high frequency harbor porpoise clicks. Anecdotal reports from surveys utilizing Seiche PAM systems with simultaneous visual and acoustic monitoring indicate that the acoustic range estimates have been sufficiently accurate for decision-making on whether vocal animals are within or beyond a 500m mitigation zone.

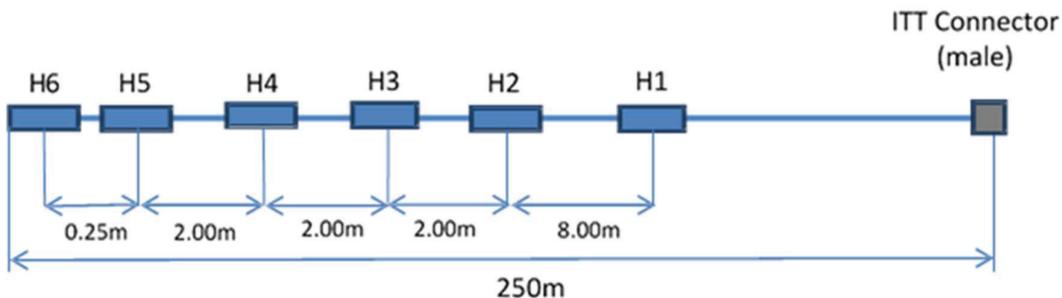

Hydrophone calibration:

Seiche hydrophone elements and arrays are calibrated to meet the NMFS standards described in the BO where a specification and calibration document for each array deployed will be provided as an attachment to the final report.

Appendix C: Survey Vessel Photos



Figure 1: Survey vessel *M/V Sanco Atlantic*

Legend

-  RGPS Sensor
-  Centre of Source (COS)
-  Vessel Reference Point

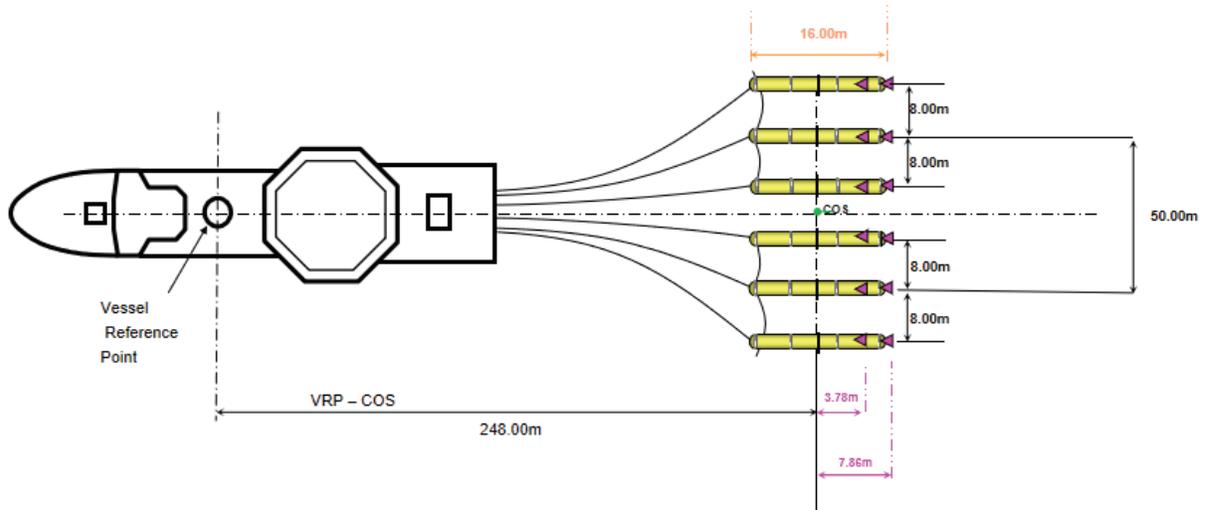


Figure 2: Configuration of the seismic arrays on the *M/V Sanco Atlantic* during production.

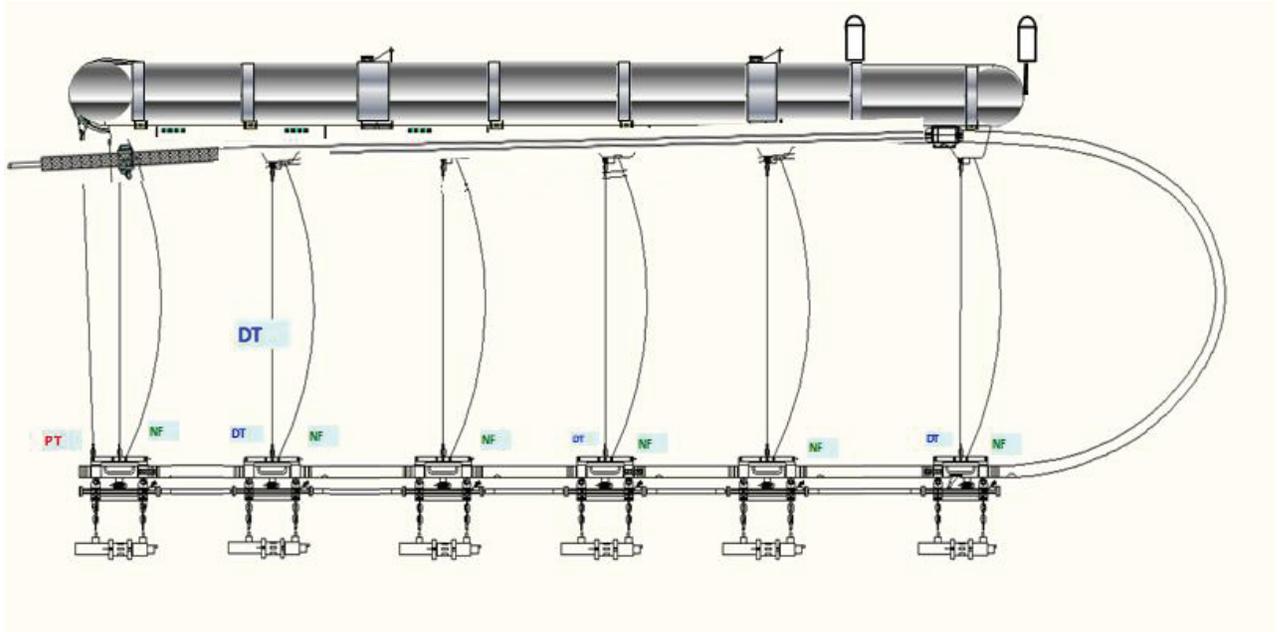


Figure 3: Configuration of the source array on the *M/V Sanco Atlantic* during production.

Appendix D: PSOs and PAM Operators

**RPS PSOs and PAM Operators Onboard
Sanco Atlantic During Chevron Bigfoot DAS VSP**

Ian Rendon

Daniela Cuevas

Yosi Osuna

Henry Lewis

Andrea Aguilar

Kelsey Gibbons

Michael Morse

Appendix E: Reticle Binocular Calibration Table

Week #	Date	Observer Name	Reticule Binocular Estimated Distance (m)	True Distance from Radar (m)	Sea State (Beaufort)	Wind Force (knots)	Swell (m)
1	10/15/2021	Andrea Aguilar	2650	2600	2	3	<2
1	10/16/2021	Kelsey Gibbons	2670	2900	4	17	<2
1	10/16/2021	Michael Morse	1380	1500	4	12	<2
2	10/19/2021	Michael Morse	2400	2446	6	23	<2
2	10/19/2021	Kelsey Gibbons	2670	2590	6	24	<2
2	10/19/2021	Andrea Aguilar	2670	2590	6	24	<2
3	10/26/2021	Kelsey Gibbons	920	900	2	4	<2
3	10/26/2021	Michael Morse	1950	1925	2	6	<2
3	10/26/2021	Andrea Aguilar	2000	1875	2	7	<2
4	11/2/2021	Andrea Aguilar	247	255	2	8	<2
4	11/2/2021	Michael Morse	933	867	4	11	<2
4	11/2/2021	Kesley Gibbons	920	867	4	11	<2
5	11/8/2021	Michael Morse	866	820	3	9	<2
5	11/8/2021	Kelsey Gibbons	648	660	3	11	<2
5	11/8/2021	Andrea Agular	560	588	3	8	<2

Appendix F: Vessel Specific PAM Deployment Procedures and PAM Validation Documents

Hydrophone Deployment

The PAM system installed on the *M/V Sanco Atlantic* utilized a standard six channel hydrophone array and a depth transducer. This was linked to a 100-meter deck cable via a connector that run to the sound acquisition box on the mounted rack.

The forward hydrophone pair (H1, H2) was used to analyze and record LF sound (10 through 24,000 Hz); the middle hydrophone pair (H3, H4) was used to analyze and record middle frequencies (200 through 200,000 Hz), and the trailing hydrophone pair (H5, H6) was used to analyze and record HF sound (2,000 through 200,000 Hz). Broadband channel sensitivity at the output from the pre-amplifier is typically -166 dB re: 1 V/ μ Pa.

The PAM installation consisted of a conventional tow cable attached to several hooks that helped to mitigate any potential trip hazards. The main winch spooled the array off the top deck to a desire tow length which was then secured by a Chinese finger to reduce sway in the water and relieve tension from the cable. The cable run directly down the port side of the arrays. See figures G-1 and G-2 for illustrations.



Figure G-1: PAM cable and tow cable on the port side winch.



Figure G-2: Tow rope supporting the tow cable held by the boom (left); Chinese finger attached with a shackle to the tow rope (right).

During the PAM cable deployment, the operator verified that the electronics in the PAM Station were powered off and the deck PAM cable connection was disconnected. Then the winch hydraulics lever was opened in order to operate the winch and unspool the PAM cable. The PAM cable was deployed 115 meters from the winch on the port stern of the top deck. At this distance, a shackle was attached to a Chinese finger which was connected to a tow rope. The tow rope was connected to a boom which was mounted off the port side of the vessel to avoid entanglement of the PAM cable with the seismic gun umbilicals. Final adjustments were made in order to achieve the appropriate amount of towing tension. The tension was enough to keep the cable in place on the stern without tightening it to the point that damage could occur during vessel turns. The winch hydraulics lever was then closed, the deck cable was connected to the tow cable on the winch and the hydraulic pump motor was switched off before returning to the instrument room to initiate the program.

When the PAM cable was fully deployed 115 meters astern from the vessel, the hydrophones were approximately 70 meters from the center of the source, towing at a depth that ranged between approximately eight and 12 meters, depending on the sea current and vessel's speed. Chain links were secured at the end of the tow section of the cable to function as ballast weight and to achieve proper towing depth. The cable was wrapped with friction tape before the chain was fastened in order to prevent chaffing, and links were secured to the cable with zip ties and electrical tape.

Appendix G: Excel Data Sheets of Monitoring Effort, Source Operations, and Detections of Protected Species during the Survey

Appendix H: Shapefiles of Vessel Position with Operational Source Status

Appendix I: Photographs of Identified Protected Species Visually Detected During the Survey



Figure I-1. VD01: Unidentifiable shelled sea turtle, 20 October 2021.



Figure I-2. VD02: Loggerhead sea turtle, 6 November 2021.

Appendix J: Lead PSO Data Certification



I, Ian Rendon, am familiar with the protocols outlined in Appendix A: Seismic Survey Mitigation and Protected Species Observer Protocols, implemented by the Bureau of Ocean Energy Management (BOEM) and Bureau of Safety and Environmental Enforcement (BSEE), which provide guidelines to operators in complying with the Endangered Species Act (ESA; 16 U.S.C. §§ 1531-1544) and Marine Mammal Protection Act (MMPA; 16 U.S.C. §§1361- 1423h).

I hereby certify that, to the best of my knowledge, the data collected by the Protected Species Observer (PSOs) offshore and the information that was provided to RPS by the PSO team for our vessel to compile this report is accurate.

Name: Ian Rendon

Position: Lead Protected Species Observer

Date: 12/20/2021

Signed  _____
C48D3FDF331A452...


I, Chance Skinner, am familiar with the protocols outlined in Appendix A: Seismic Survey Mitigation and Protected Species Observer Protocols, implemented by the Bureau of Ocean Energy Management (BOEM) and the Bureau of Safety and Environmental Enforcement (BSEE), which provide guidelines to operators in complying with the Endangered Species Act (ESA; 16 U.S.C. §§ 1531-1544) and Marine Mammal Protection Act (MMPA; 16 U.S.C. §§1361- 1423h).

I hereby certify that, to the best of my knowledge, the information provided in this report that was compiled by the RPS Project Support Manager is accurate.

Name: Chance Skinner

Position: RPS Project Support Specialist

Date: 12/20/2021

Signed  _____
1BE930686F3A4AD...